



otočné tlačítko Ø22 3-polohy s návratem Ronis 455

ZB4BG08

Základní popis

výrobková řada	Harmony XB4
typ produktu nebo součásti	Hlava pro přepínač ovládaný klíčem
Krátký název zařízení	ZB4
materiál obruby	Kovová chromovaná
průměr montážního otvoru	22 mm
typ hlavice	Standard
prodej v nedělitelném množství	1
tvar hlavice	Kruh
návrat	Zprava do středu
provedení ovládače	Ovládač otočný s klíčem černá
typ ovládací hlavice	S návratem
informace o pozicích ovládače	3 pozice +/- 45°
typ zámku	Key 455
pozice vyjmutí klíče	Vlevo

Doplňky

CAD celková šířka	29 mm
CAD celková výška	29 mm
CAD celková hloubka	72 mm
hmotnost přístroje	0,098 kg
odolnost proti vysokotlakému mytí	7000000 Pa při 55 °C, vzdálenost : 0,1 m
mechanická životnost	1000000 cykly
označení el. složení	C3 pro <6 kontakty použitím jednoduchý bloky v čelní montáž C4 pro <6 kontakty použitím jednoduchý a dvojité bloky v čelní montáž C5 pro <5 kontakty použitím jednoduchý bloky v čelní montáž C6 pro <5 kontakty použitím jednoduchý a dvojité bloky v čelní montáž C7 pro <4 kontakty použitím jednoduchý bloky v čelní montáž C8 pro <4 kontakty použitím jednoduchý a dvojité bloky v čelní montáž C11 pro <3 kontakty použitím jednoduchý bloky v čelní montáž
představení přístroje	Základní element

Prostředí

stupeň ochrany	TH
teplota okolí pro uskladnění	-40...70 °C

Právní omezení: Tato dokumentace není určena jako náhrada a nesmí se používat k určení vhodnosti těchto produktů pro specifické uživatelské aplikace.

provozní teplota	-40...70 °C
kategorie přepětí	Třída I conforming to IEC 60536
stupeň krytí IP	IP66 podle IEC 60529 IP67 IP69 IP69K
stupeň krytí NEMA	NEMA 13 NEMA 4X
stupeň ochrany IK	IK06 přední strana conforming to IEC 50102
Normy	EN/IEC 60947-5-1 UL 508 EN/IEC 60947-1 EN/IEC 60947-5-4 GB 14048.5 CSA C22.2 č. 14 EN/IEC 60947-5-5
certifikace výrobků	CSA DNV BV LROS (Lloyds register of shipping) UL listed
odolnost proti vibracím	5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
odolnost proti otřesům	30 gn (doba trvání = 18 ms) pro akcelerace, polovina sin. vlny podle IEC 60068-2-27 50 gn (doba trvání = 11 ms) pro akcelerace, polovina sin. vlny podle IEC 60068-2-27

Jednotky balení

Typ balení 1	PCE
Počet jednotek v balení 1	1
Výška balení 1	3,500 cm
Šířka balení 1	5,500 cm
Délka balení 1	9,200 cm
Hmotnost balení 1	103,000 g
Typ balení 2	S03
Počet jednotek v balení 2	100
Výška balení 2	30,000 cm
Šířka balení 2	30,000 cm
Délka balení 2	40,000 cm
Hmotnost balení 2	10,836 kg

Záruční lhůta

Záruka	18 měsíců
--------	-----------

Environmental Data

Společnost Schneider Electric si klade za cíl dosáhnout do roku 2050 nulového stavu díky partnerství v dodavatelském řetězci, materiálům s menším dopadem a oběžnosti prostřednictvím naší pokračující kampaně "Use Better, Use Longer, Use Again" s cílem prodloužit životnost a recyklovatelnost produktů.

[Vysvětlení Environmental Data](#) >

[Jak hodnotíme udržitelnost produktů](#) >

environmentální stopa	
Uhlíková stopa (kg CO2 eq.)	1
Informace o životním prostředí	Environmentální profil produktu

Use Better


Materiály a obaly	
Balení s kartónovým obalem	Ne
Obal bez plastu	Ne
Číslo SCIP	F28cb399-1b6a-409d-ac7b-4169e47b25c8
Nařízení China RoHS	Prohlášení o nařízení China RoHS

Use Again

Přebalení a opětovná výroba	
Zasílací profil	Informace o ukončení životnosti
Zpětný odběr	No

Dimensions Drawings

Dimensions

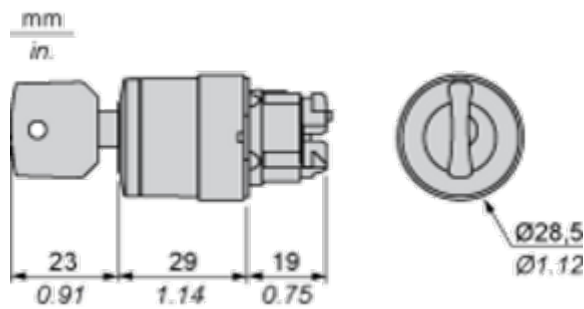


Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board	Connection by Faston Connectors
(1) Diameter on finished panel or support (2) 40 mm min. / 1.57 in. min. (3) 30 mm min. / 1.18 in. min. (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm $^{+0.4}_0$ / 0.88 in. $^{+0.016}_0$) (5) 45 mm min. / 1.78 in. min. (6) 32 mm min. / 1.26 in. min.	

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection

Panel Cut-outs (Viewed from Installer’s Side)

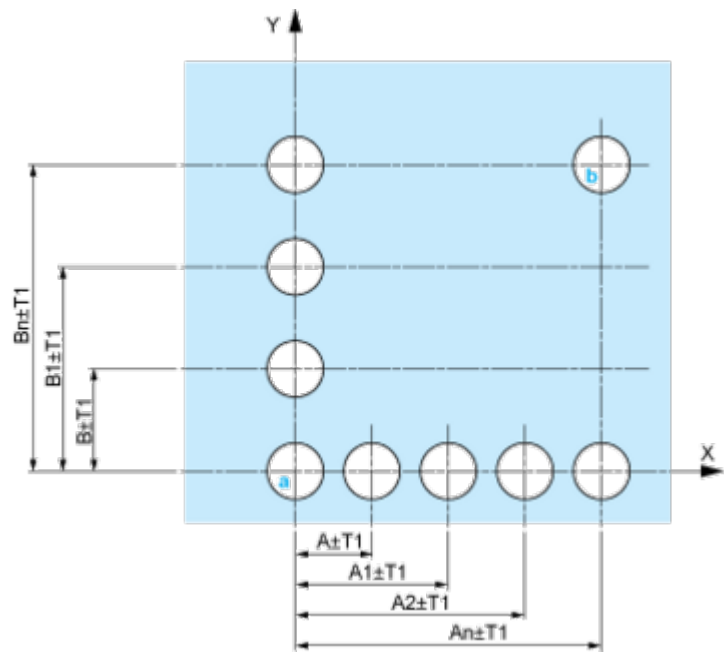


A: 30 mm min. / 1.18 in. min.


B: 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

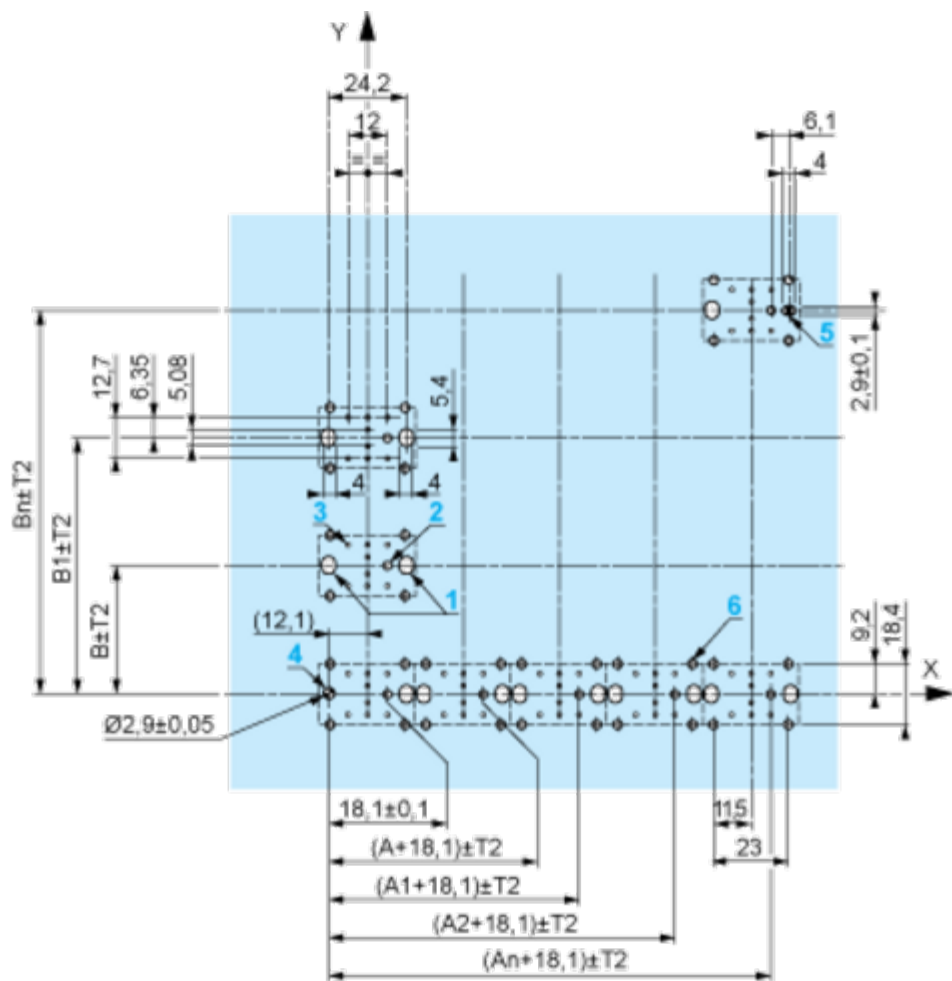

A: 30 mm min.
B: 40 mm min.
Dimensions in in.

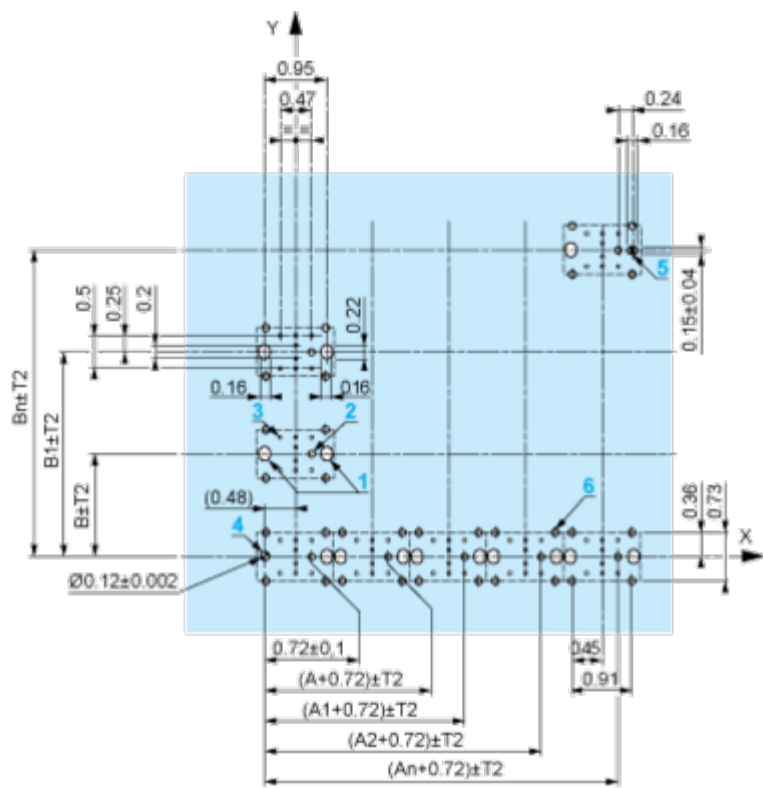

A: 1.18 in. min.
B: 1.57 in. min.


General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in: $T1 + T2 = 0.3 \text{ mm max.}$

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: $\pm 2^\circ 30'$ (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
 - every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked **a** and **b** are diagonally opposed and must align with those marked **4** and **5**.

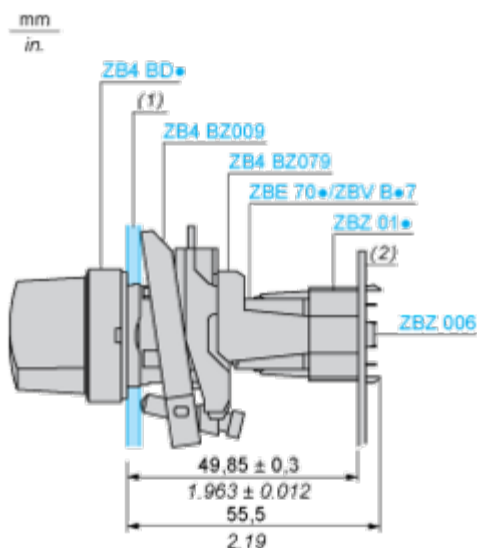

(1) Panel

(2) Printed circuit board


Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$ for centring adapter ZBZ 01•
- 3 $8 \times \varnothing 1.2 \text{ mm} / 0.05 \text{ in.}$ holes
- 4 1 hole $\varnothing 2.9 \text{ mm} \pm 0.05 / 0.11 \text{ in.} \pm 0.002$, for aligning the printed circuit board (with cut-out marked **a**)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked **b**)
- 6 4 holes $\varnothing 2.4 \text{ mm} / 0.09 \text{ in.}$ for clipping in adapter ZBZ 01•

Dimensions An + 18.1 relate to the $\varnothing 2.4 \text{ mm} \pm 0.05 / 0.09 \text{ in.} \pm 0.002$ holes for centring adapter ZBZ 01•.

Technical Description


Electrical Composition Corresponding to Code C3



Electrical Composition Corresponding to Code C4




Electrical Composition Corresponding to Code C5




Electrical Composition Corresponding to Code C6




Electrical Composition Corresponding to Code C7



Electrical Composition Corresponding to Code C8



Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



Legend

Single contact



Double contact



Light block



Possible location



Sequence of Contacts Fitted to 3-position Selector Switch Body

Position 315°



Push	Position	Top			
		Bottom			
	Location		Left	Centre	Right
	State		1	1	0
	Contacts		N/O	N/C	
			closed	closed	open
			open	open	closed

Position 0°



Push	Position	Top			
		Bottom			
	Location		Left	Centre	Right
	State		0	0	0
	Contacts		N/O	N/C	
			open	open	open
			closed	closed	closed



Position 45°



Push	Position	Top			
		Bottom			
	Location		Left	Centre	Right
	State		0	1	1
Contacts	N/O		open	closed	closed
	N/C		closed	open	open

Technical Illustration


Dimensions

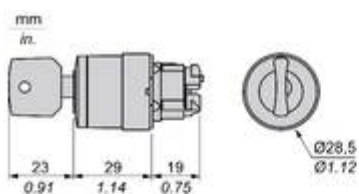

		a (mm)	a (in.)	b (mm)	b (in.)
		40	1.57	30	1.18
ZBE.....	ZBV.....				
		45	1.77	32	1.26
ZBE.....3	ZBV.....3				
		40	1.57	30	1.18
ZBE.....4	ZBV.....4				
		50	1.97	30	1.18
ZBE.....5	ZBV.....5				
		40	1.57	30	1.18
ZBE.....9	ZBV.....9				
		40	1.57	30	1.18
ZBRT●	ZBRV1				

Offer Marketing Illustration

Product benefits / Features

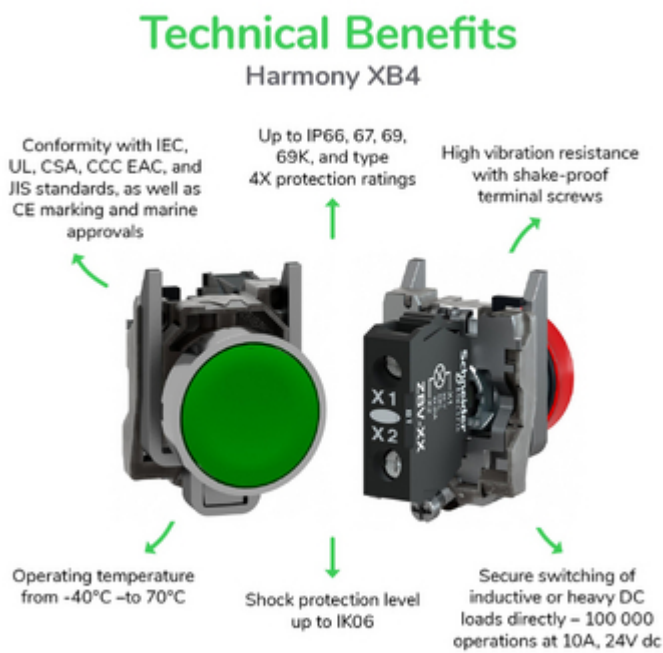

Offer Marketing Illustration

Product benefits / Features

Features

Harmony XB4



Quick and easy assembly and disassembly



Various types of connection: screw clamp, connector, Faston connector, spring terminal, or printed circuit board



Excellent mechanical connection with operator head



Large set of accessories to customize your panels



Robustness to withstand harsh environments



Image of product / Alternate images

Alternative

