

IP20 IK06
IP44 IK06

CRI 90

+40
C
-20

650°

CE



DRIVER NOT INCLUDED
MULTIPOWER

RG0



UGR
≤19



LED Itaca RR 30X60



DRIVER NOT INCLUDED

300 600

30

+

FAST CONNECTOR

Driver con connessione rapida
Driver with fast connection.

LED driver multipower

RN9161FAST500

RN8166DAFA500 **1043**

RN9160/DALI500 **1043**

colour	W max	lm output	lm/W	K	Kg	S+L
B	18	max 2600	145	3000	3,20	25888/30603K
B	18	max 2600	145	4000	3,20	25888/3060

LED Itaca RR 30X120



DRIVER NOT INCLUDED

300 1200

30

+

FAST CONNECTOR

Driver con connessione rapida
Driver with fast connection.

LED driver multipower


RN9164/FAST

RN8166DAPUFAS **1043** - PUSH

colour	W max	lm output	lm/W	K	LxPxH cm	Kg	S+L
B	36	max 5200	145	3000	30x120x5	3,20	25888/301203K
B	36	max 5200	145	4000	30x120x5	3,20	25888/30120
B	36	max 5200	145	4000	30x150x5	3,20	25888/30150

A richiesta: aumentando il numero dei moduli si può arrivare alla potenza di 60W
On demand: by increasing the number of modules, the power of 60W can be reached

LED Itaca QR 60X60

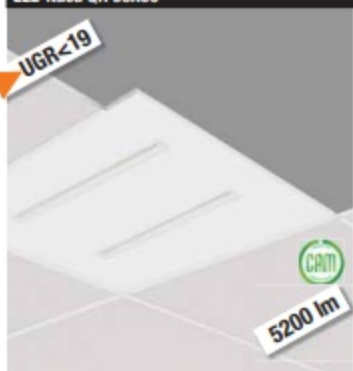

DRIVER NOT INCLUDED

300 600

30

+

FAST CONNECTOR

Driver con connessione rapida
Driver with fast connection.

LED driver multipower

RN9164/FAST

RN8166DAPUFAS **1043** - PUSH

colour	W max	lm output	lm/W	K	Kg	S+L
B	36	max 5200	145	3000	3,20	258883K
B	36	max 5200	145	4000	3,20	25888

A richiesta: aumentando il numero dei moduli si può arrivare alla potenza di 60W
On demand: by increasing the number of modules, the power of 60W can be reached