

*ETITEC V T2 255/20 1+1

svodič přepětí



ETI kód:	002442954
Funkce:	SPD
Typ:	T2
AC max continuous operating voltage U_c :	255 V
I_n (8/20):	20 kA
Typ proudu:	AC
Jmenovité AC napětí:	230 V
U_p - Úroveň ochrany napětí (kV):	1,5 kV
Dálková signalizace:	No
Svodový proud:	Yes
Typ sítě:	TT/TN-S
Počet modulů:	2
Montáž:	Home and residential building protection
Vestavná hloubka (mm):	68 mm
Stupeň krytí IP:	IP20
Aplikovaná technologie:	MOV
Skupina katalogu:	ETITEC V

Online stránka produktu [🔗](#)

Dokumenty



KATALOG TECHNICKÝCH DAT



NÁVOD K POUŽITÍ



PROHLÁŠENÍ



2D SOUBOR



3D SOUBOR



EPLAN SOUBOR

ETIM

Max. conductor cross section flexible (fine-strand)	25 mm²
Max. discharge surge current (8/20)	40 kA
Nominal voltage AC	230 V
Max. conductor cross section solid (solid, stranded)	35 mm²
Degree of protection (IP)	IP20
Mounting method	DIN rail (top hat rail) 35 mm
Short-circuit breaking capacity (Iscbr)	25 kA
System configuration TN-S	Ano
System configuration TT	Ano
Signalling at the device	Optical
Category type 2	Ano
Max. continuous voltage AC	255 V
Nominal discharge surge current (8/20)	20 kA

Logistika

Produkt

Hmotnost	0,216 kg
Net width	36 mm
Net height	95,1 mm
Net depth	66,9 mm
Stock unit of measure	pcs


Základní balení

Basic packaging quantity	1 pcs
EAN code for a basic packaging	3838895828983
Basic packaging weight	0,23 kg
Basic Packaging Dimensions Height	70 mm
Basic Packaging Dimensions Width	40 mm
Basic Packaging Dimensions Depth	100 mm
Basic packaging volume	0,28 dm ³

Přepravní balení

Intermediate packaging quantity	4 pcs
EAN code for a intermediate packaging	3838895859048
Intermediate packaging weight	1,025 kg
Intermediate Packaging Dimensions Height	78 mm
Intermediate Packaging Dimensions Width	105 mm
Intermediate Packaging Dimensions Depth	183 mm
Transport packaging quantity	48 pcs
EAN code for a transport packaging	3838895828990
Transport packaging weight	13 kg
Transport Packaging Dimensions Height	290 mm
Transport Packaging Dimensions Width	210 mm
Transport Packaging Dimensions Depth	460 mm
Transport packaging volume	28,014 dm ³
Pallet quantity	1 920 pcs
Customs tariff	85354000

Symbol connection

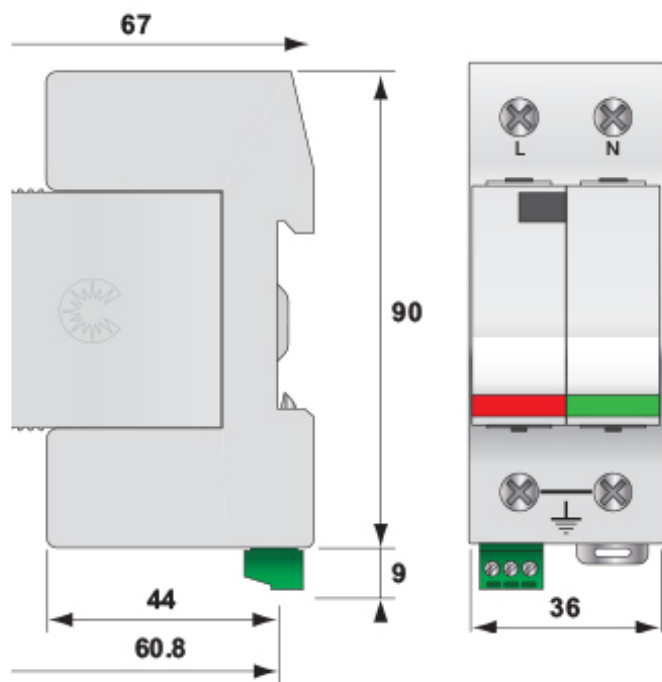

Dimension

