

ETIMAT 6 1p+N B1



Specifikace

Kód ETI	002112509
Popis	ETIMAT 6 1p+N B1
Jmenovitý proud (A)	1A
Vypínací charakteristika	B
Počet pólů	1+N
Zkratová odolnost (kA)	6kA
Typ napětí	AC
Jmenovité impulsní výdržné napětí (kV)	6kV
Jmenovité AC napětí (V)	230V
Jmenovitá frekvence (Hz)	50Hz/60Hz
Jmenovitý průřez (mm ²)	1mm ² -25mm ²
Normy	IEC/EN 60898-1, IEC 60947-2
Funkce	MCB

[Online stránka produktu](#)


Další dokumentace

[Katalog technických údajů](#)[3D model](#)[2D File](#)[Návod](#)[Prohlášení CE](#)[Eplan file](#)


Mezinárodní klasifikace ETIM

Klasifikace	EC000042
Název třídy	Miniature circuit breaker (MCB)
Release characteristic	B
Number of poles (total)	2
Number of protected poles	1
Rated current	1A
Rated voltage	230V
Rated insulation voltage U_i	500V
Rated impulse withstand voltage U_{imp}	4kV
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 230 V	6kA
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 400 V	6kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 230 V	6kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 400 V	6kA
Voltage type	Other
Frequency	50...60Hz
Current limiting class	3
Suitable for flush-mounted installation	Ano
Concurrently switching neutral conductor	Ano
Over voltage category	3
Pollution degree	3
Additional equipment possible	Ano
Width in number of modular spacings	2
Built-in depth	68mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-25...55°C
Connectable conductor cross section multi-wired	1...25mm ²
Connectable conductor cross section solid-core	1...25mm ²

Tavné charakteristiky

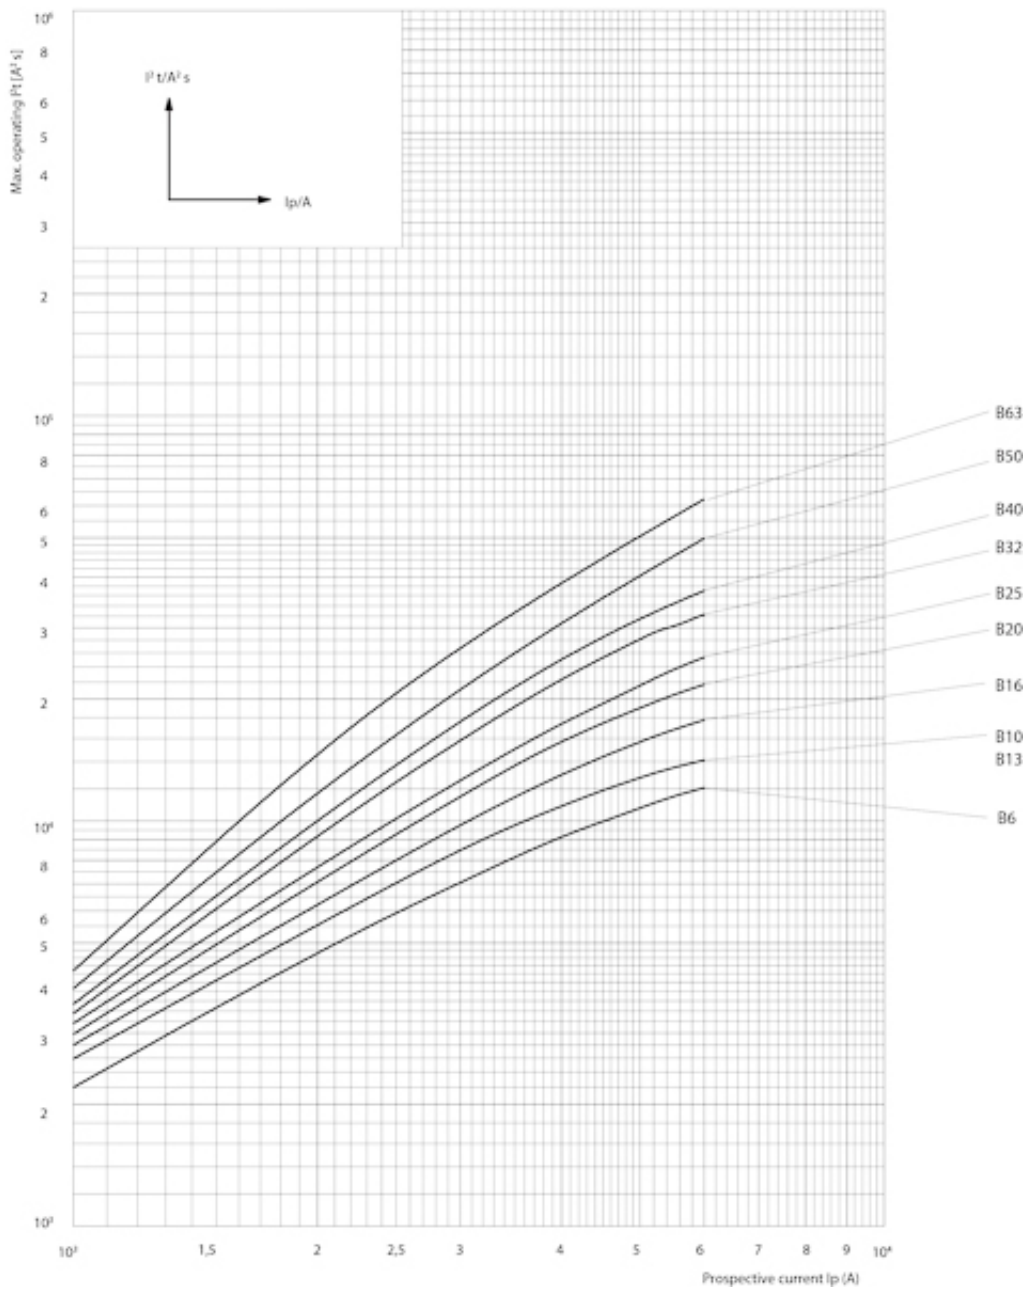

Rozměrový výkres

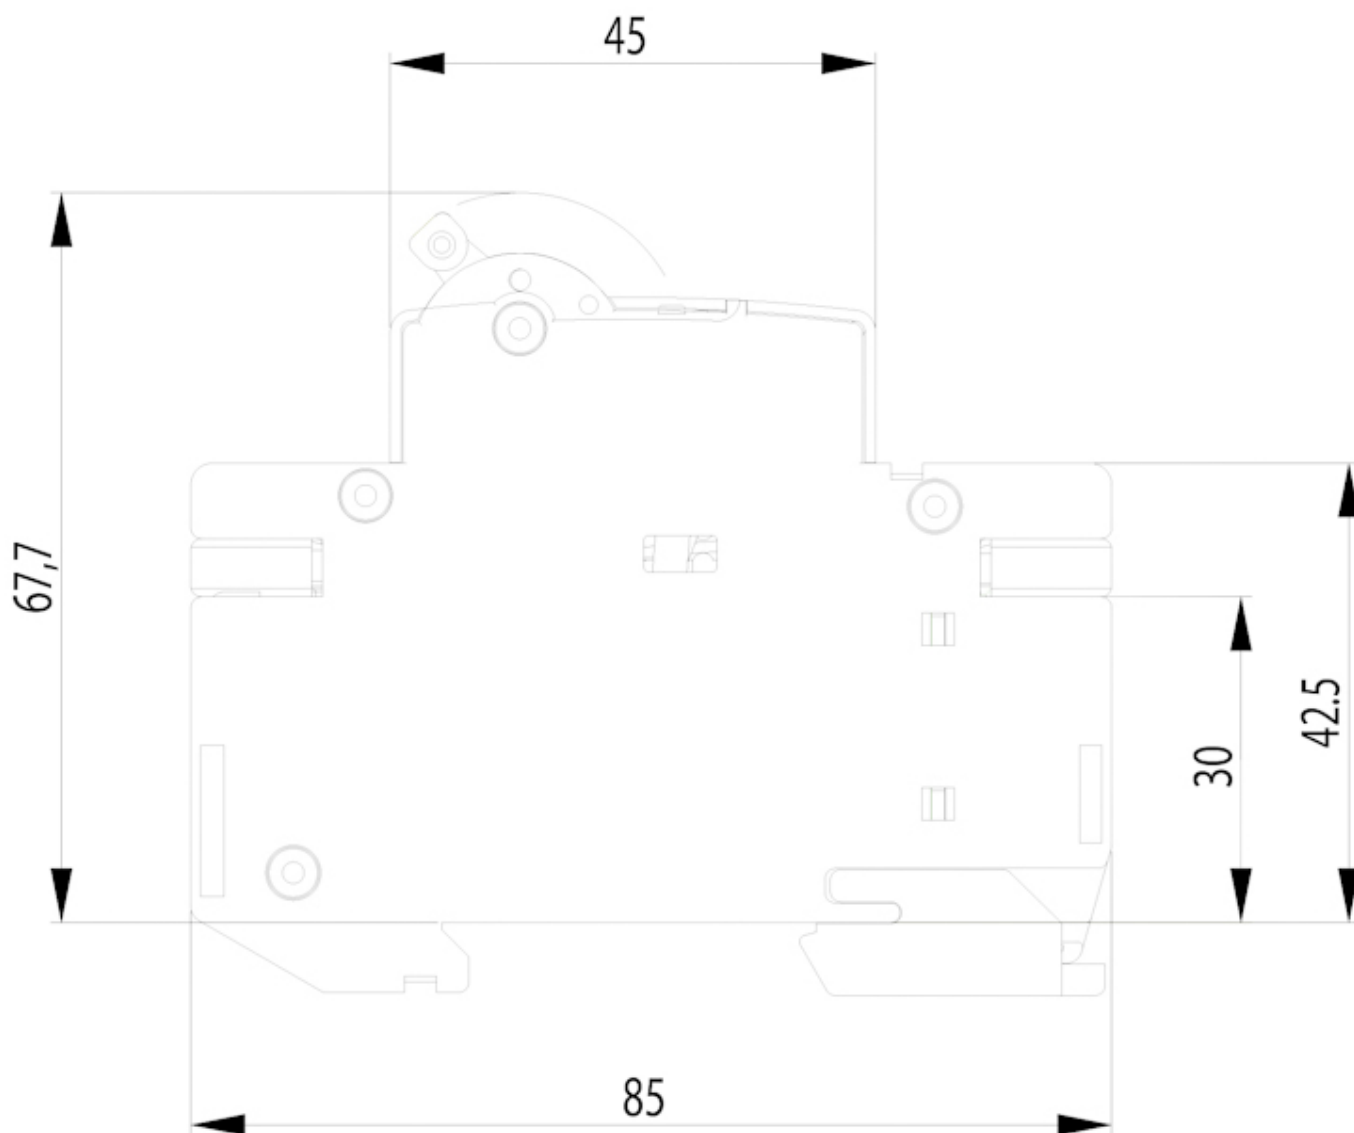


Symbol/připojení


1P




1P+N



2P



3P



3P+N

