

ETIMAT P10 3p B3



Specifikace

Kód ETI	001901305
Popis	ETIMAT P10 3p B3
Jmenovitý proud (A)	3A
Vypínací charakteristika	B
Počet pólů	3
Zkratová odolnost (kA)	10kA
Typ napětí	AC
Jmenovité impulsní výdržné napětí (kV)	6kV
Jmenovité AC napětí (V)	415V
Jmenovité DC napětí (V)	415V
Jmenovitá frekvence (Hz)	50Hz/60Hz
Jmenovitý průřez (mm ²)	1mm ² -25mm ²
Normy	EN/IEC 60898
Funkce	MCB

[Online stránka produktu](#)


Další dokumentace

[Katalog technických údajů](#)[3D model](#)[2D File](#)[Prohlášení CE](#)[Eplan file](#)


Mezinárodní klasifikace ETIM

Klasifikace	EC000042
Název třídy	Miniature circuit breaker (MCB)
Release characteristic	B
Number of poles (total)	3
Number of protected poles	3
Rated current	3A
Rated voltage	415V
Rated insulation voltage U_i	500V
Rated impulse withstand voltage U_{imp}	6kV
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 230 V	10kA
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 400 V	10kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 230 V	10kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 400 V	10kA
Voltage type	AC
Frequency	50...60Hz
Current limiting class	3
Suitable for flush-mounted installation	Ano
Over voltage category	3
Pollution degree	2
Additional equipment possible	Ano
Width in number of modular spacings	3
Built-in depth	70mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-40...70°C
Connectable conductor cross section multi-wired	1...25mm ²
Connectable conductor cross section solid-core	1...25mm ²

Tavné charakteristiky

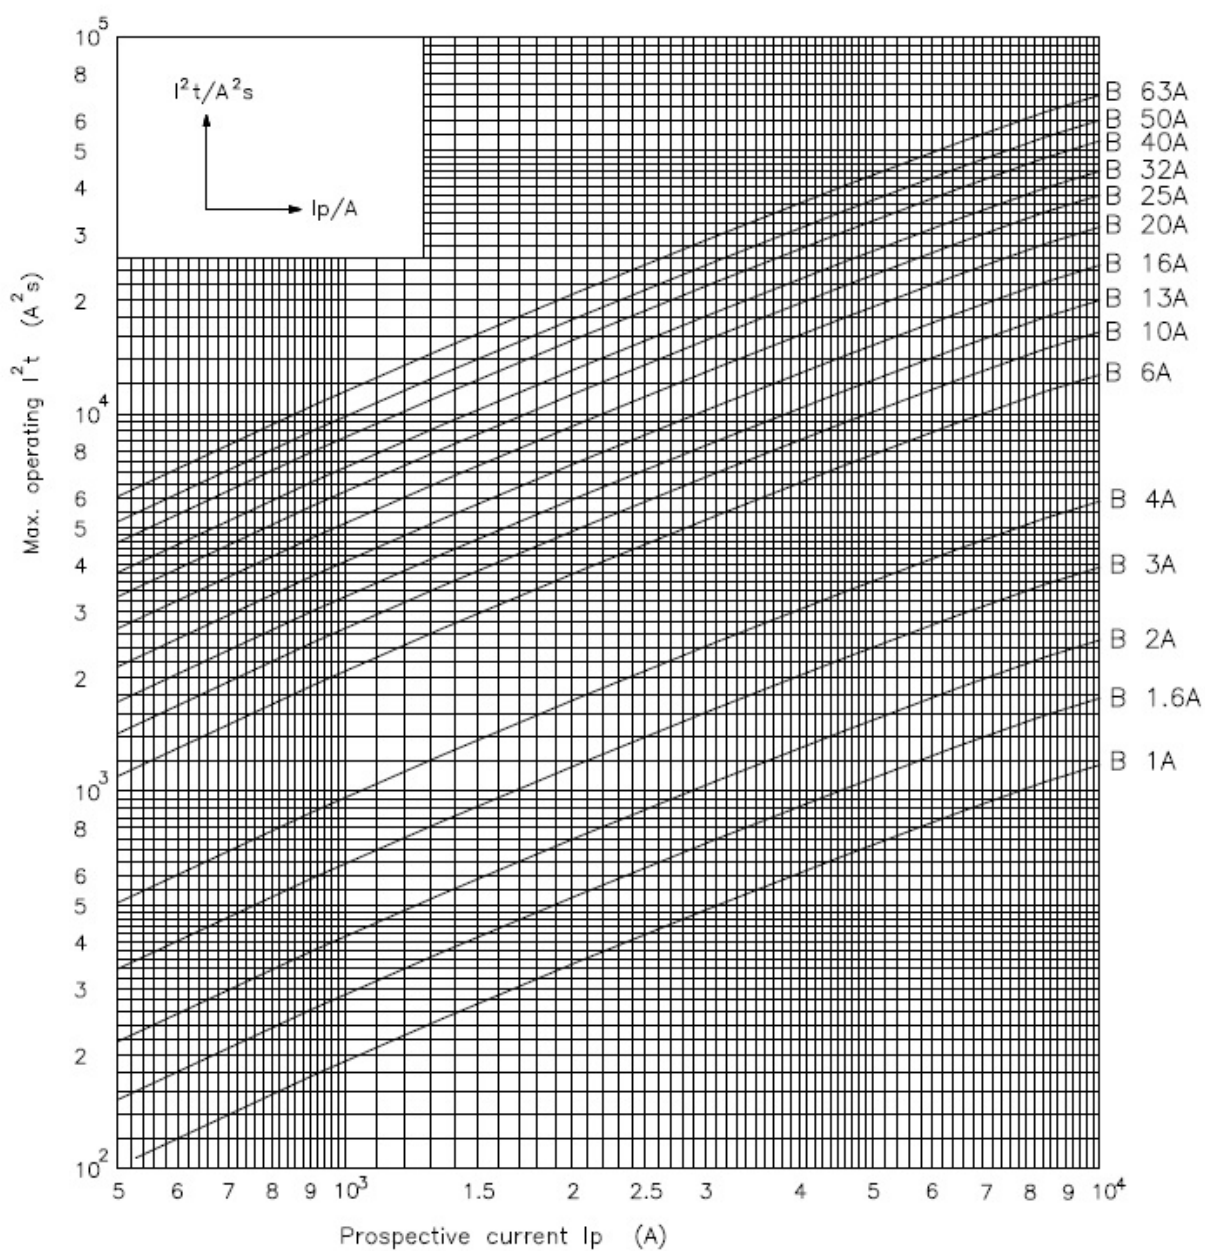

Rozměrový výkres

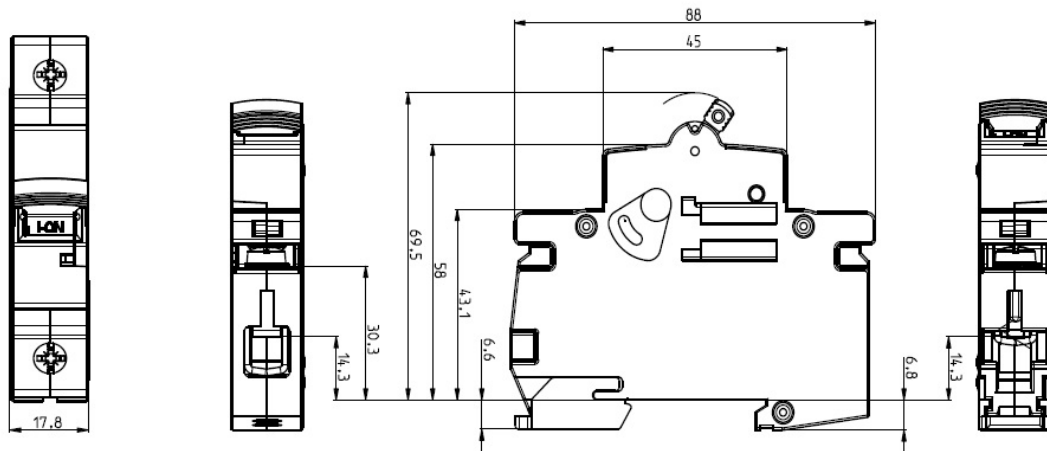

Symbol/připojení

1p




1p+n



2p



3p



3p+n

