

EB2 250/3L 250A 3p



Specifikace

Kód ETI	004671073
Popis	EB2 250/3L 250A 3p
Jmenovitý proud (A)	250
Počet pólů	3
Skupina katalogu	EB2
Normy	60947
Typ připojení	přední připojení
Jmenovité impulsní výdržné napětí (kV)	8
Jmenovité pracovní napětí (V AC)	690V
Jmenovité izolační napětí (V)	800
Jmenovitá zkratová schopnost při 415V Icu/Ics (kA)	25/19
Jmenovité provozní napětí (V DC)	250V
Tepelné nastavení	0,63-1
Magnetické nastavení	6-10
Nastavitelné nebo pevné	nastavitelný

[Online stránka produktu](#)


Další dokumentace

[3D model](#)[Návod](#)[Prohlášení CE](#)[Eplan file](#)

Mezinárodní klasifikace ETIM


Klasifikace	EC000228
Název třídy	Power circuit-breaker for trafo/generator/installation protection
Rated permanent current I _u	250A
Rated short-circuit breaking capacity I _{cu} at 400 V, 50 Hz	25/19kA
Overload release current setting	157.5...250A
Adjustment range undelayed short-circuit release	1500...2500A
Type of electrical connection of main circuit	Screw connection
Device construction	Built-in device fixed built-in technique
With switched-off indicator	1
Number of poles	3
Type of control element	Rocker lever
Motor drive integrated	
Motor drive optional	1
Degree of protection (IP)	IP20

Characteristics

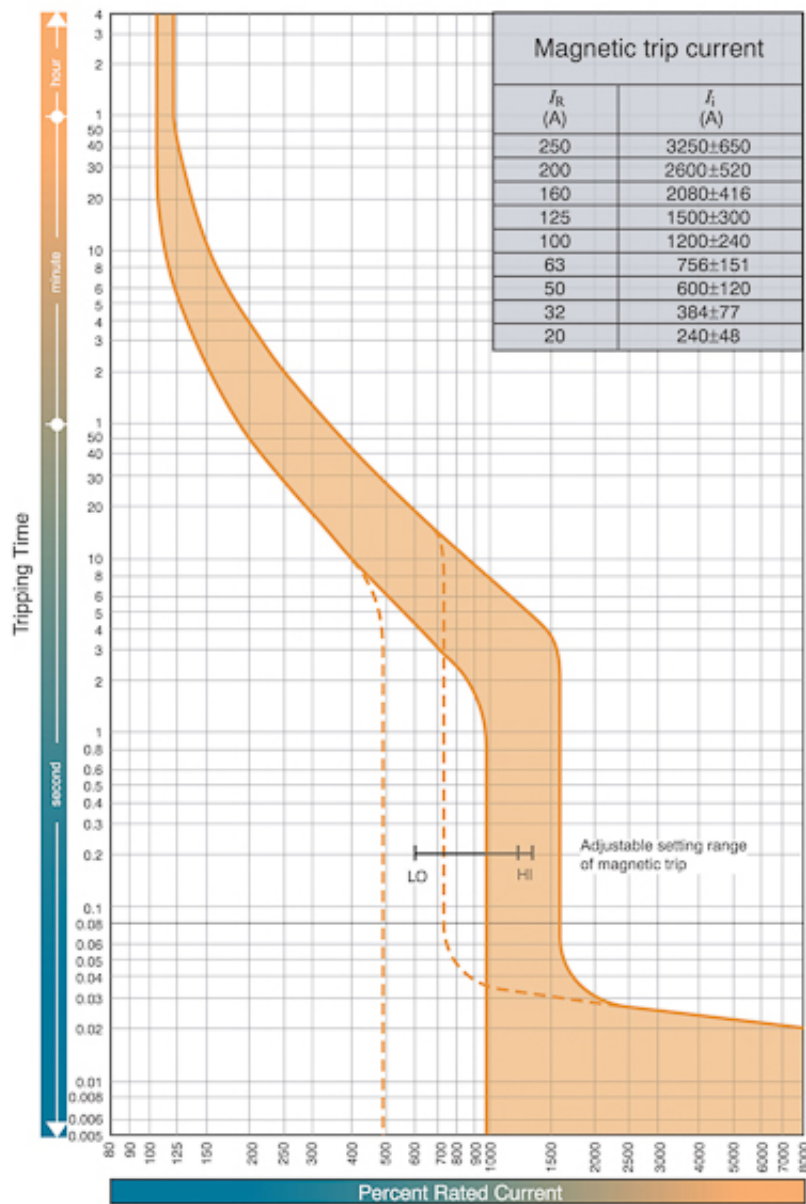


Rozměrový výkres


Front connected

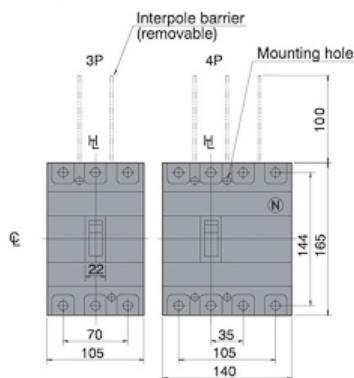


Preparation of conductor

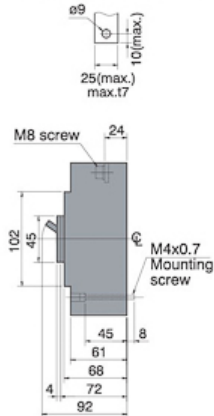


With terminal bars (optional)




Drilling plan




Rear connected

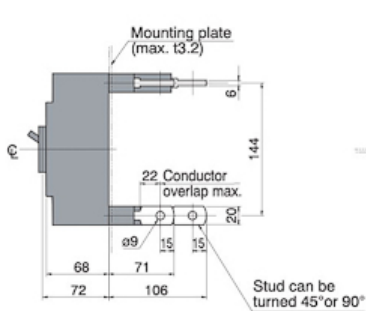

Drilling plan

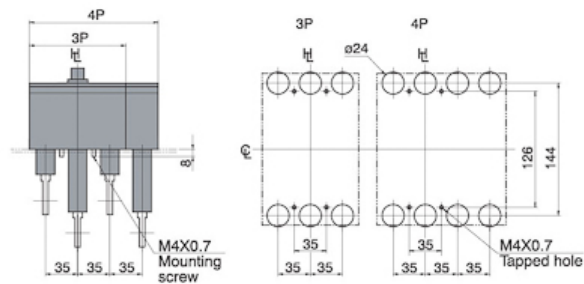

Panel cutout (Front view)



Panel cutout dimensions shown give an allowance of 1.0mm around the handle escutcheon.