


# TM.ONTEC PPN 31P M AT



Catalog number	TM-PN.31P.AT03W
Duration time	3 h
Operating mode	M
Version	AT - auto-test / self-test
Colour	RAL9003
Visibility	32 m
Luminance	>200 cd/m <sup>2</sup>
Maximum light power (the luminaire can power the light source with a different power)	2.5 W
Active power	6.7 W
Power supply	210÷250 V AC 50÷60 Hz
Power supply CB	186÷254 V DC
Dimming mode	no
Temperature range	10-40 °C
Material	PC
Appliance classes	2
IP	IP20
IK	IK06
Battery	LiFePO <sub>4</sub> /C 6.4V 1.5Ah
Warranty	24 months - ST 36 months - AT 60 months - DATA, CB
LED Lifetime	50 000 work hour
View fitting	double-sided fitting
Insulation class	II

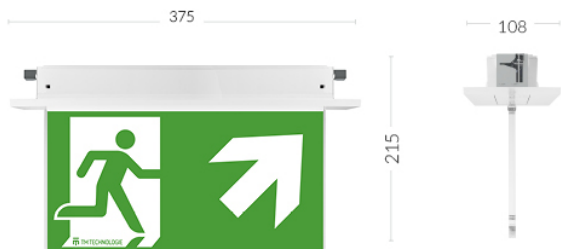