




## PRODUCT DETAILS



UPCOMING NEW FAST RUNNER UPDATED PHASE-OUT PRODUCTS

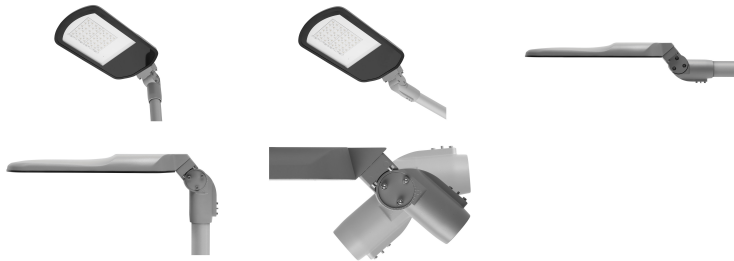

## DOWNLOADS

[Certificates](#)

[Datasheet](#)

[Installation manual](#)

# MEGIN II M

## Description

|                                      |                                                                                                                                               |
|--------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>MOUNTING</b>                      | Pole top / side entry installation (PMT)                                                                                                      |
| <b>LIGHT SOURCE</b>                  | LED                                                                                                                                           |
| <b>OPTICAL SYSTEM</b>                | Lenses (LNS)                                                                                                                                  |
| <b>LIGHT DISTRIBUTION</b>            | Direct                                                                                                                                        |
| <b>WIRING</b>                        | External lead-in flexible cable<br>Electronic control gear FIX / DALI / STEP DIM / INT<br>DIM + CONSTANT LUMEN OUTPUT (ECC / EDO / EBC / EPO) |
| <b>MATERIALS</b>                     | Cover: PC<br>Frame: sheet steel<br>Housing: die-cast aluminium<br>Tilttable spigot: die cast aluminium<br>Housing: grey RAL 9006 (G06)        |
| <b>SURFACE FINISH</b>                |                                                                                                                                               |
| <b>SERVICE LIFETIME (Ta=25°C)</b>    | 60,000 hours / L90 (25/35/44/59/71W)<br>60,000 hours / L80 (87/122W)                                                                          |
| <b>AMBIENT OPERATING TEMPERATURE</b> | From -35 °C to +40 °C                                                                                                                         |

## AREAS OF APPLICATION STREET AND URBAN



## Accessories

---

# List of products

| PRODUCT NAME                                                  | STATUS | QUICK DOWNLOADS                                               |
|---------------------------------------------------------------|--------|---------------------------------------------------------------|
| MEGIN II M (L01) LED 4900lm/740 1x44W, LED DRIVER, RAL 9006   | New    | RFA / 3DS / <a href="#">IES</a> / <a href="#">LDT</a> / CURVE |
| MEGIN II M (L01) LED 7350lm/740 1x59W, LED DRIVER, RAL 9006   | New    | RFA / 3DS / <a href="#">IES</a> / <a href="#">LDT</a> / CURVE |
| MEGIN II M (L01) LED 14250lm/740 1x122W, LED DRIVER, RAL 9006 | New    | RFA / 3DS / <a href="#">IES</a> / <a href="#">LDT</a> / CURVE |
| MEGIN II M (L01) LED 8750lm/740 1x71W, LED DRIVER, RAL 9006   | New    | RFA / 3DS / <a href="#">IES</a> / <a href="#">LDT</a> / CURVE |
| MEGIN II M (L01) LED 2950lm/740 1x25W, LED DRIVER, RAL 9006   | New    | RFA / 3DS / <a href="#">IES</a> / <a href="#">LDT</a> / CURVE |
| MEGIN II M (L01) LED 3950lm/740 1x35W, LED DRIVER, RAL 9006   | New    | RFA / 3DS / <a href="#">IES</a> / <a href="#">LDT</a> / CURVE |
| MEGIN II M (L01) LED 10850lm/740 1x87W, LED DRIVER, RAL 9006  | New    | RFA / 3DS / <a href="#">IES</a> / <a href="#">LDT</a> / CURVE |

The manufacturer reserves all rights to make changes in materials and components used in production of lighting fittings.