

Sylvania Granit 0-10V - NEW
Granit IP65 0-10V 19500lm 840 WB
0039734



Product features

- Integrated LED highbay; Black aluminium housing; 19500Lm; 120 W; 163 Lm/W; 4000K; Drive current: 470mA; CRI 80; 85° beam angle; 0-10V dimmable; IP65; IK08; Lifespan L80:B20 92,000 hrs; (D x H) 298 x 168 mm; 1.5 m mains cable; 1.5 m control cable; 1.2 m chain length including hooks.



PRODUCT OVERVIEW

Product name	Granit IP65 0-10V 19500lm 840 WB
Technology	LED
Cap/Base	N/A
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4357100
Warranty	5 years
Fixture luminous flux (lm)	19500
Luminaire efficacy (lm/W)	163
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	85
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	120
Electrical protection	Class I
Dimmable	Yes
Dimming method	0-10V
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9017 - Traffic black
IP rating	IP65
IK rating	IK08
Product EAN number	5410288397344

DATA TABLE

General data	
Product name	Granit IP65 0-10V 19500lm 840 WB
Technology	LED
Cap/Base	N/A
General application	Logistics & Industry

Sylvania Granit 0-10V - NEW

Granit IP65 0-10V 19500lm 840 WB

0039734

Operating temperature range (°C)	-30°C...+50°C
ETIM Class	EC001716
E-number FI	4357100
Warranty	5 years

Optical data

Fixture luminous flux (lm)	19500
Luminaire efficacy (lm/W)	163
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	85
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	120
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	10
Electrical protection	Class I
No. Of switching cycles before premature failures	>100000
Dimmable	Yes
Dimming method	0-10V
Drive current (mA)	470
Inrush Current (A)	80
Inrush Duration (µs)	300
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	5
Max. products per 13A C Breaker	6
Max. products per 16A C Breaker	9
Max. products per 20A C Breaker	11
Max. products per 10A B Breaker	3
Max. products per 13A B Breaker	4
Max. products per 16A B Breaker	5
Max. products per 20A B Breaker	6
Mains surge immunity (differential mode - > L-N) (kV)	6
Mains surge immunity (common mode -> L/N - GND) (kV)	6

Sylvania Granit 0-10V - NEW
Granit IP65 0-10V 19500lm 840 WB
0039734

Lifetime data

Lifespan L70 B50	120000
Lifespan L80 B20	92000
Lifespan L90 B50	51000

Physical data

Housing colour	RAL 9017 - Traffic black
IP rating	IP65
IK rating	IK08
Nominal Product Height (mm)	168
Nominal Product Diameter (mm)	298
Weight (kg)	2.243


Packaging

Product EAN number	5410288397344
Packaging single length / height (cm)	32.5
Packaging single width (cm)	32.5
Packaging single depth (cm)	14.5
DUN14 (outer)	05410288397344
Units per outer package	1
Packaging outer length / height (cm)	32.5
Packaging outer width (cm)	32.5
Packaging outer depth (cm)	14.5

Safety data

Optimal operating condition (°C)	-30-50
----------------------------------	--------

PHOTOMETRY

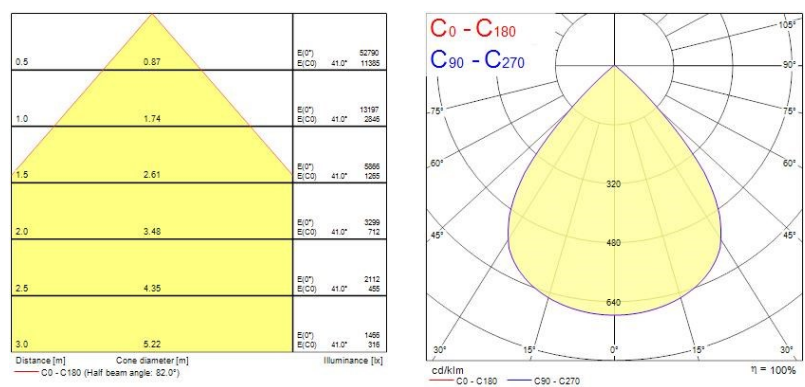

TECHNICAL DRAWINGS

Sylvania Granit 0-10V - NEW

Granit IP65 0-10V 19500lm 840 WB
0039734

