



Cable Tray, heavy

with combi perforation and pre-embossed stripping openings, without connector

RSSKP 100.400 S OV

EAN Code: 4013339180714
Smallest packaging unit: 2 x 3 m
quantity unit: m M

the photorealistic images are to be considered as reference images

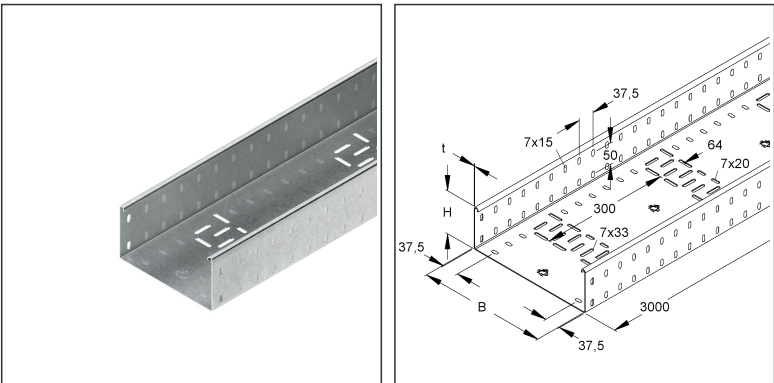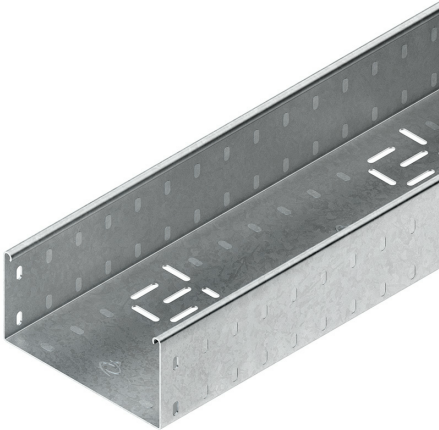

Article Description

Cable tray, heavy, 100x400x3000 mm, with combi perforation and minting, steel, pre-galvanised according to DIN EN 10346, without connector

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	9,373 kg / m
Weight in kg per 100	937 kg / 100m

Technical Datasheet

Cable Tray System

RSSKP 100.400 S OV

the photorealistic images are to be considered as reference images

Physical Article Dimensions

Height	100.00 mm
Width	400 mm
Depth/length	3000 mm

Packing Dimension

3 meters = 1 piece

Lenght	3000 mm	Width	400 mm	Height	100.00 mm
Gross weight	28 kg	Volume	0,120 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

6 meters = 1 bundle

✓ VP2-smallest Packaging Unit (PU) ✓ VP2-preferred PU

Lenght	3000 mm	Width	405 mm	Height	105.00 mm
Gross weight	56 kg	Volume	0,128 m³		
Min. Quantity	6.00 m	Max. Quantity	6.00 m		

108 meters = 1 rack

Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	1110 kg	Volume	3,904 m³		
Min. Quantity	108.00 m	Max. Quantity	108.00 m		

Tender Text

Cable tray, heavy, according to DIN EN 61537, with combi-perforation for stepless barrier strip fastening and pre-embossed knock-out openings, without connectors but with connector perforation at both ends for connection, for the walkable cable tray system. Please order two Universal Splice plates RSUVKS 100-1.5 S per joint separately.

Dimensions (approx. Dimensions)

H x W : 100 x 400 mm

Material thickness t : 2 mm

double row longitudinal

bottom perforation : 7 x 33 mm

Longitudinal spacing : 25 mm

central row spacing : 26.5 mm

double row transverse

bottom perforation : 7 x 33, 7 x 20

central row spacing : 64 mm

central pattern

longitudinal spacing : 300 mm

double row knock-out

openings on both sides : 7 x 15 mm

Longitudinal pitch : 37.5 mm

Row spacing : 50 mm

double row knock-out

openings in the bottom : 7 x 15 mm

Longitudinal pitch : 37.5 mm

Row spacing from

side rails : 37.5 mm

Delivery length L : 3000 mm

Technical Datasheet

Cable Tray System

RSSKP 100.400 S OV

the photorealistic images are to be considered as reference images

Tender Text

Usable cross-section : 39800 mm²
Material : steel, pre-galvanised according to DIN EN 10346
NIEDAX model-no. : RSSKP 100.400 S OV
EP Material_____ EP Wage_____
Unit price/metre

Safety & Environment

REACH Date	25.06.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Cover

Model No.	Description
RDHFS 9 VZL	Cover clamp, steel, electro galvanised according to DIN EN ISO 2081, blue passivate
RDRS 400-2.0 S	Cover for cable tray, antislip, 405x3000 mm, steel, pre-galvanised according to DIN EN 10346
RDRS 9X2	Turning bolt, reinforced design, steel, pre-galvanised according to DIN EN 10346
RDS 400	Cover for cable tray, 405x3000 mm, steel, pre-galvanised according to DIN EN 10346
RDSRS 400	Cover for cable tray, antislip, 405x3000 mm, t=6,0 mm, steel, pre-galvanised according to DIN EN 10346
RDSRSL 400	Cover for cable tray, antislip, 405x3000 mm, t=4,0 mm, steel, pre-galvanised according to DIN EN 10346
RDVS 400	Cover for cable tray, 405x3000 mm, with turning bolt, steel, pre-galvanised according to DIN EN 10346
RDVSRS 400	Cover for cable tray, antislip, 405x3000 mm, t=6,0 mm, steel, pre-galvanised according to DIN EN 10346
RDVSRSL 400	Cover for cable tray, antislip, 405x3000 mm, t=4,0 mm, steel, pre-galvanised according to DIN EN 10346

Technical Datasheet

Cable Tray System

RSSKP 100.400 S OV

the photorealistic images are to be considered as reference images

Related items

Barrier strip

Model No.	Description
RTSKQ 100-2.0 S	Barrier strip, 98x2998 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RTSQF 100-1.5/1000 S	Barrier strip, flexible, 98x1000 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RW 100-1.5 S	Barrier strip, 98x2998 mm, t=1,5 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RW 100-2.0 S	Barrier strip, 98x2998 mm, t=2,0 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories

Connector

Model No.	Description
RSUVKS 100-1.5 S	Universal splice plate with edge protection, 79x148 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories