

EFI-P4 B 63/0.03



Specifikace

Kód ETI	002061953
Popis	EFI-P4 B 63/0.03
Jmenovitý proud (A)	63
Jmenovitý reziduální proud (A)	0.03
Typ proudu	B
Un (V)	415
Typ uchycení	TH 35
Hlubka (mm)	70
Počet pólů	3+N
Stupeň krytí IP	IP20
Jmenovitá frekvence (Hz)	50/60
Normy	EN/IEC 61008-1, IEC 62423
Jmenovitý průřez (mm ²)	1...25
Jmenovitý podmíněný pracovní proud (kA)	10

[Online stránka produktu](#)



Další dokumentace

[Katalog technických údajů](#)[3D model](#)[Návod](#)[Prohlášení CE](#)[COM_ETISTORE_ITEM_DOCTYPE_whitePa
per](#)[Eplan file](#)

Mezinárodní klasifikace ETIM

Klasifikace	EC000003
Název třídy	Residual current circuit breaker (RCCB)
Number of poles	4
Rated voltage	415V
Rated current	63A
Rated fault current	30mA
Rated insulation voltage Ui	500V
Rated impulse withstand voltage Uimp	4kV
Mounting method	DIN rail
Leakage current type	B
Selective protection	
Short-time delayed tripping	
Short-circuit breaking capacity (Icw)	10kA
Surge current capacity	3kA
Frequency	50/60 Hz
Additional equipment possible	1
With interlocking device	
Degree of protection (IP)	IP20
Width in number of modular spacings	4
Built-in depth	70mm
Ambient temperature during operating	-40...70°C
Pollution degree	2
Connectable conductor cross section multi-wired	1...25mm ²
Connectable conductor cross section solid-core	1...25mm ²

Rozměrový výkres

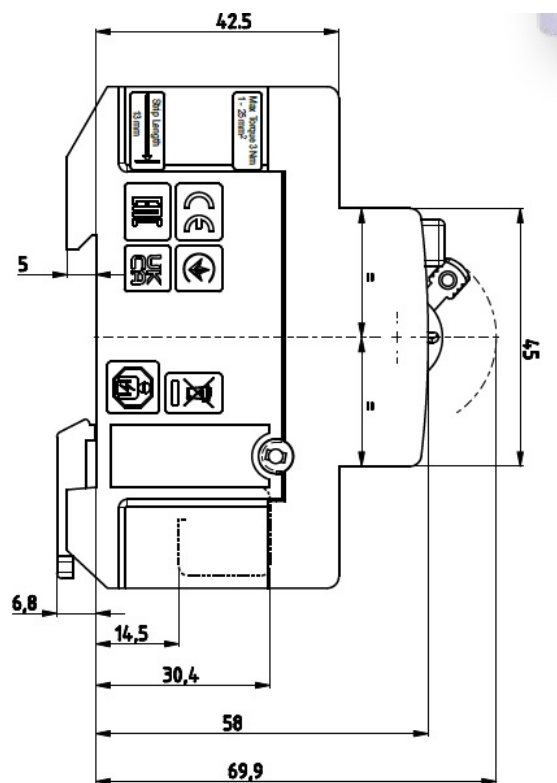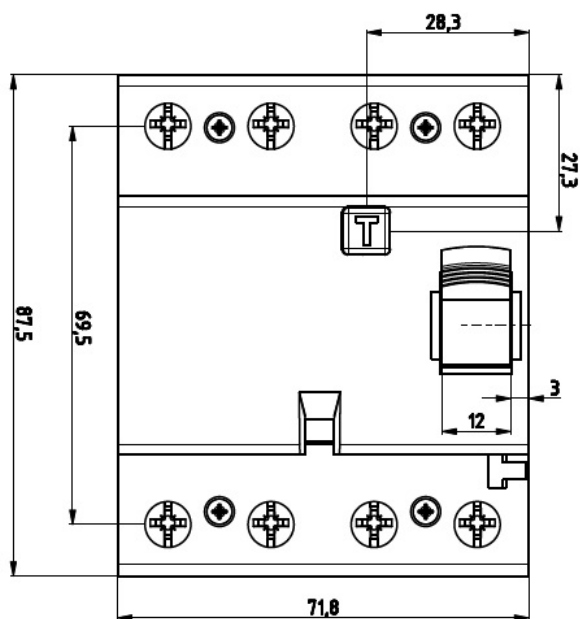

Symbol/připojení

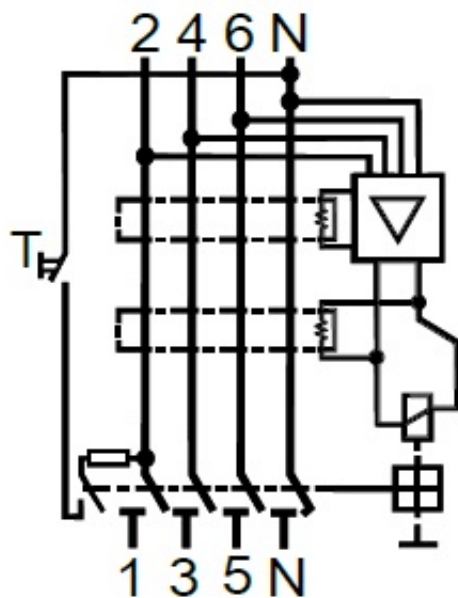


Schéma zapojení

