

Slotted trunking halogen free

88

Cable management system
for cabinets and equipment

Higher safety for the installation assured by
the trunking's sturdiness.

The cover will stay in place and will not slip,
it is easy to mount and remove.

Possibility to cut until the base for better
branching.

Product family information



100% recycled halogen free
thermoplastic component

U43X 

Added value



Technical characteristics

ELECTRICAL



No earthing required.

SERVICE TEMPERATURE




Minimum transport and storage temperature: -45°C
Maximum application temperature: +90°C

IN FRONT OF FIRE



Non flame propagating.

LENGTH



2 m

RAW MATERIAL




100% recycled halogen free thermoplastic component.

CE MARKING



Conformity with Standard EN 50085-2-3:2010.

For more detailed information see data sheet



Conformity declaration



Quality Marks



Approvals





Rolling stock




Railway infrastructure



Airport



Work spaces: office

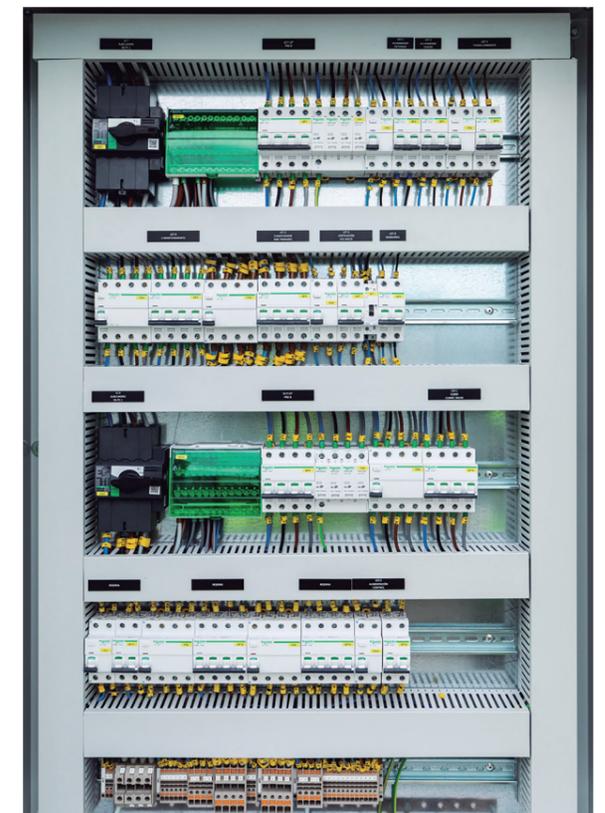

Heights (H): 20, 30, 40 mm

		25x20	30x30		42x20	42x30	42x43	42x60	42x80
	Slotted trunking 2 m	25.20.88	30.30.88			40.20.88	40.30.88	40.40.88	40.60.88
	Cable compactor		40850					40850	

Height (H) 60 mm

		60x20	60x30		60x43	60x60	60x80	60x100	60x120
	Slotted trunking 2 m	60.20.88	60.30.88			60.40.88	60.60.88	60.80.88	60.100.88
	Cable retainer				40864-4	40865-4	40864-4 + 40864-4	40864-4 + 40865-4	40865-4 + 40865-4
	Cable compactor		40850					40850	

Height (H) 80 mm

		Slotted trunking sizes (mm)			80x60	80x80	80x100	80x120
		80x30	80x43		80x60	80x80	80x100	80x120
	Slotted trunking 2 m	80.30.88	80.40.88		80.60.88	80.80.88	80.100.88	80.120.88
	Cable retainer		40884-4		40885-4	40884-4 + 40884-4	40884-4 + 40885-4	40885-4 + 40885-4
	Cable compactor		40850				40850	

Height (H) 100 mm

		100x30		100x43	100x60	100x80	100x100
	Slotted trunking 2 m	100.30.88			100.40.88	100.60.88	100.80.88
	Cable retainer			40894-4	40895-4	40894-4 + 40894-4	40894-4 + 40895-4
	Cable compactor		40850			40850	



See next page

Funcional elements

	Label-holder profile support	40801-44
	Label-holder profile 2 m	40802-44



Fixing elements in U60X

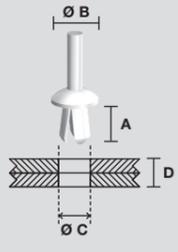	Plastic rivet	<p>A = 6 mm $\varnothing B = 6$ mm $\varnothing C = 3,0-3,25$ mm D = 1-3 mm</p> <p>1303 (1)</p>
		<p>A = 8 mm $\varnothing B = 11$ mm $\varnothing C = 5,1-5,25$ mm D = 2-5 mm</p> <p>1305</p>
		<p>A = 12 mm $\varnothing B = 11$ mm $\varnothing C = 6,1-6,5$ mm D = 5-9 mm</p> <p>1309</p>
		<p>A = 21 mm $\varnothing B = 11$ mm $\varnothing C = 6,1-6,5$ mm D = 10-18 mm</p> <p>1318</p>
	Riveting tool	<p>Riveting tool: can be used with part no. 1305, 1309 and 1318</p> <p>L = 225 mm</p> <p>1300</p>
		<p>Riveting tool: can be used with part no. 1303.</p> <p>L = 120 mm</p> <p>1301</p>

Tools

	Cutting tool (2) To cut the main trunking	40902
---	---	--------------

Notes

- (1) To fix labels. Do not use to fix trunkings.
 (2) Cut at 90° for trunkings width ≤ 60 mm Cut at 45° for trunkings width ≤ 40 mm.