

SL3 3P M12



Specifikace

Kód ETI	001692330
Popis	SL3 3P M12
Skupina produktů	LV Lištové pojistkové odpojovače
Velikost	NH3
Jmenovitý proud (A)	630A
Počet pólů	3
Jmenovité AC napětí (V)	690V
Třída použití	AC-23B
Stupeň krytí IP	IP30

[Online stránka produktu](#) 


Další dokumentace

[Katalog technických údajů](#)[3D model](#)[2D File](#)[Návod](#)[Prohlášení CE](#)[Eplan file](#)

Mezinárodní klasifikace ETIM

Klasifikace	EC001040
Název třídy	Fuse switch disconnector
Version as main switch	Ne
Version as safety switch	Ne
Max. rated operation voltage Ue AC	690V
Rated permanent current Iu	630A
Rated operation power at AC-23, 400 V	436kW
Conditioned rated short-circuit current Iq	120kA
Suitable for fuses	NH1
Number of poles	3
With error protection	Ne
Type of electrical connection of main circuit	Screw connection
Cable entry	Other
Equipped with connectors	Ne
Suitable for floor mounting	Ne
Suitable for front mounting	Ne
Suitable for busbar mounting	Ano
Type of control element	Other
Position control element	Front side
Motor drive optional	Ne
Motor drive integrated	Ne
Version as emergency stop installation	Ne
Degree of protection (IP), front side	IP30

Rozměrový výkres

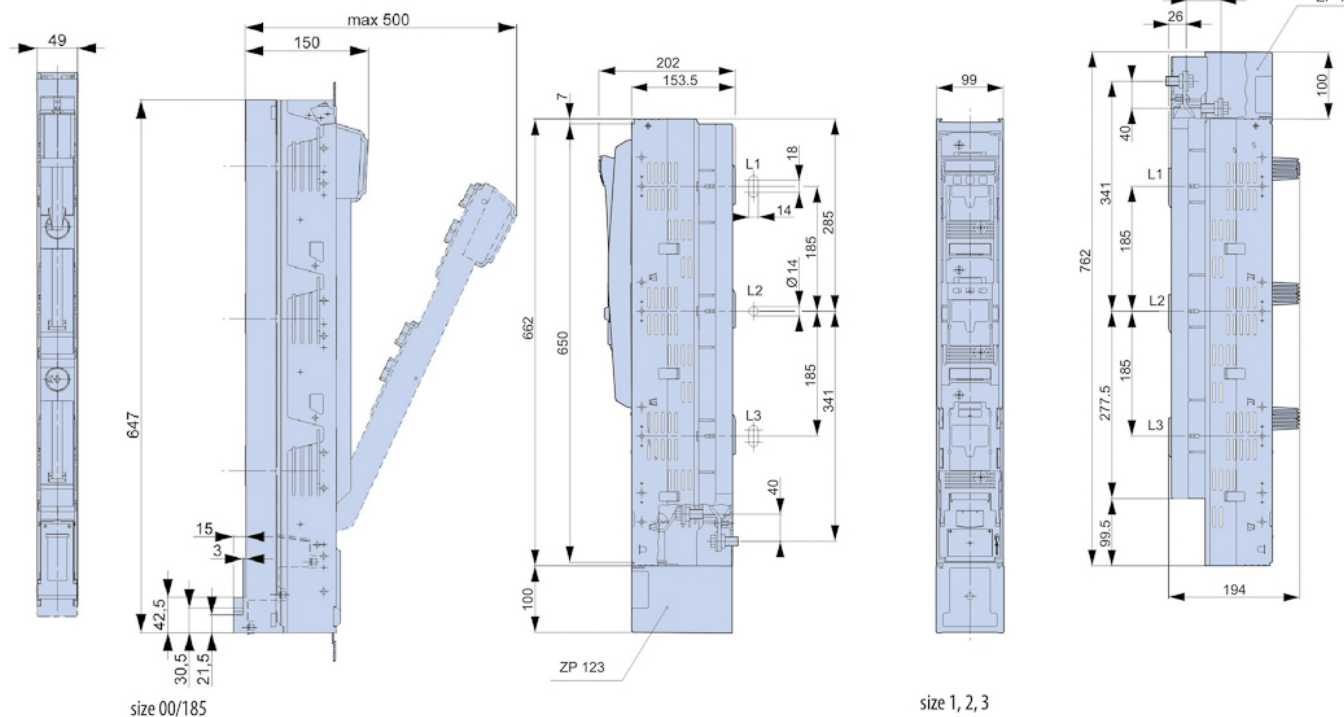

size 1, 2, 3