

## General info


## Outdoor - Wall lamps



|              |                        |
|--------------|------------------------|
| Ean          | 8021696326870          |
| Item         | SWIPE AP SENSOR GRIGIO |
| Installation | Wall lamps             |
| Warranty     | 5 years                |
| Gross weight | 1.2 kg                 |
| Volume       | 0.005681 m³            |

## Technical info

|                       |                                                                                |
|-----------------------|--------------------------------------------------------------------------------|
| Net weight            | 1.2 kg                                                                         |
| Insulation class      | I                                                                              |
| Protection index      | IP54                                                                           |
| Compliance            | CE                                                                             |
| Operating temperature | -15° ~ +45 °C                                                                  |
| Dimmer                | Non-dimmable, On-Off, PIR Motion Sensor                                        |
| Power output          | 220-240 V AC 50/60 Hz                                                          |
| Power supply          | In-built, included<br>Replaceable (by qualified operators only),<br>electronic |

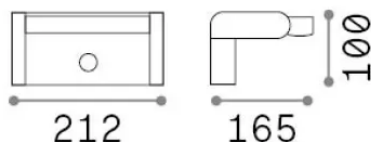

## Source info

|                        |                       |
|------------------------|-----------------------|
| Integrated source      | Integrated LED module |
| Replaceable source     | No                    |
| Power                  | LED 21 W              |
| Emission               | Direct                |
| Max consupcion         | max 21 W              |
| Features LED           | LED SMD               |
| CCT LED                | 3000 K                |
| Duration LED (t. 25°C) | 50000 h               |
| CRI                    | > 90                  |
| SDCM                   | 3                     |
| Light beam             | 105°                  |
| Light beam flux        | 2300 lm               |
| Useful light flux      | 1390 lm               |
| Photobiological risk   | 1                     |
| Standby power          | < 0.50 W              |