

NH000 UQ2 gR 80A/690V

pojistka



ETI kód:	004721213
Typ:	NH
Velikost:	NH000
Jmenovitý proud:	80 A
Charakteristika:	gR
Indikátor:	Indikátor stavu horní pojistky
Jmenovité AC napětí:	690 V
Vypínací schopnost AC (kA):	200 kA
Ztrátový výkon (W):	20,6 W
Provozní jouleový integrál (A2s):	6 200
Normy:	IEC 60269-4
Aplikace:	For protection of semiconductor devices

Online stránka produktu 

Dokumenty



KATALOG TECHNICKÝCH DAT



NÁVOD K POUŽITÍ



2D SOUBOR



3D SOUBOR



EPLAN SOUBOR

ETIM

Rated switching capacity AC	200 kA
Voltage type	AC
Fuse construction type according to IEC 60269	NH000
Rated voltage AC	690
Power loss at rated current	20,6 W
Type of fuse status indicator	Top fuse status indicator
Rated current	80 A
Utilization category	gR (general purpose semiconductor protection)

Logistika

Produkt

EAN code for a single product	3838895359135
Hmotnost	130 g
Net width	20,7 mm
Net height	80,2 mm
Net depth	52 mm
Stock unit of measure	pcs



Základní balení

Basic packaging quantity	3 pcs
EAN code for a basic packaging	3838895350378
Basic packaging weight	0,41 kg
Basic Packaging Dimensions Height	0,061 m
Basic Packaging Dimensions Width	0,087 m
Basic Packaging Dimensions Depth	0,07 m
Basic packaging volume	0 m³


Přepravní balení

Transport packaging quantity	120 pcs
EAN code for a transport packaging	3838895561958
Transport packaging weight	16,762 kg
Transport Packaging Dimensions Height	0,255 m
Transport Packaging Dimensions Width	0,295 m
Transport Packaging Dimensions Depth	0,235 m
Transport packaging volume	0,018 m³
Pallet quantity	6 240 pcs
Customs tariff	85361090

Dimension

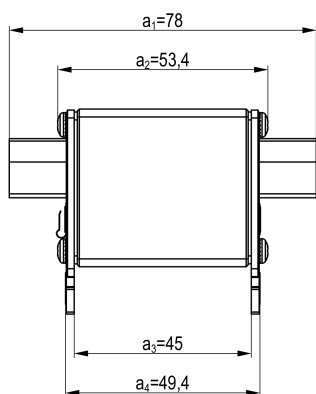

Energy characteristic

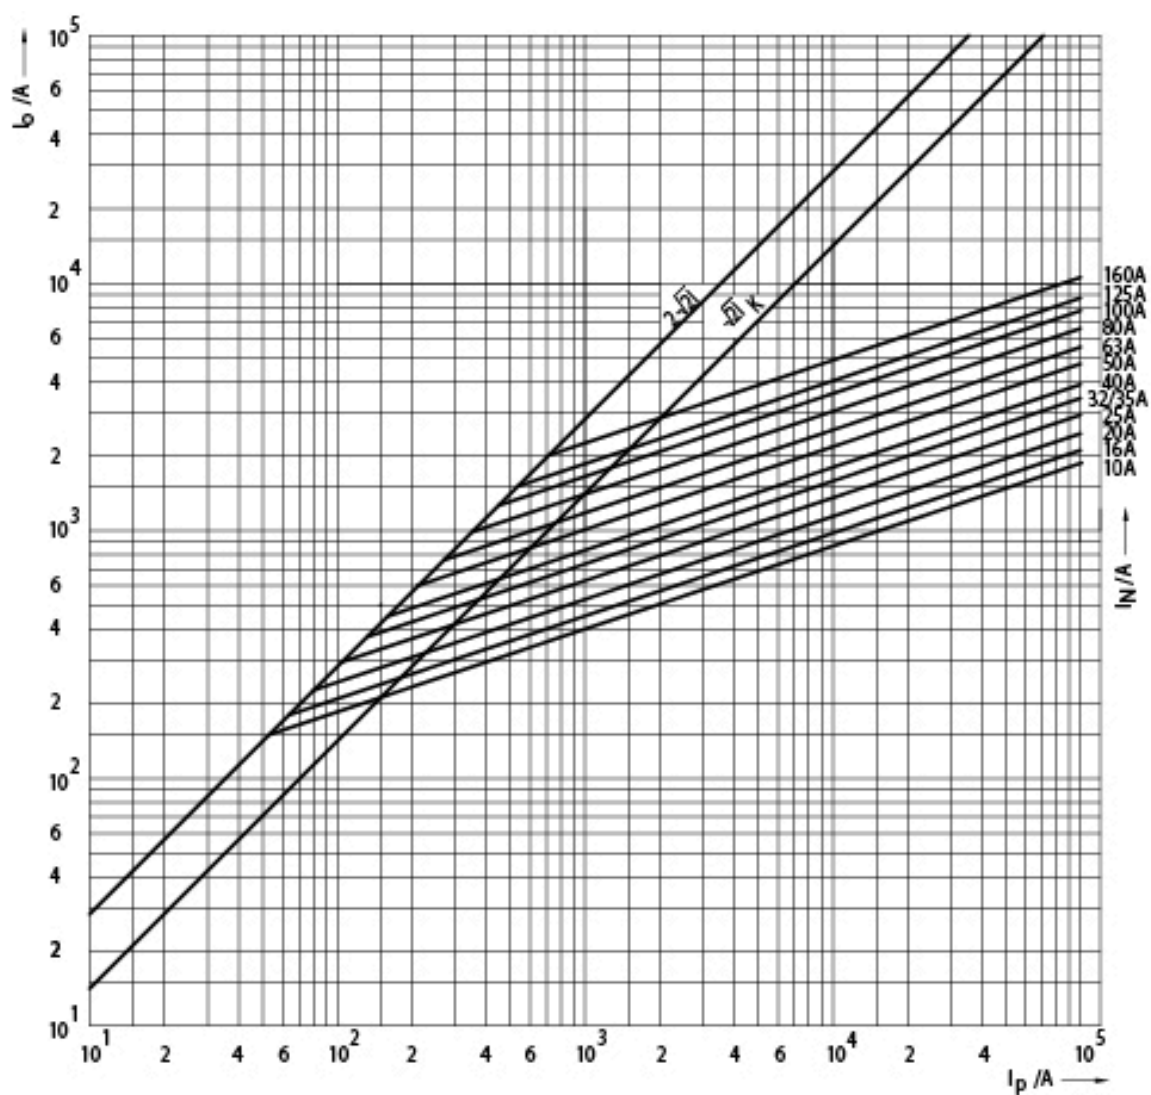

I/t characteristic

