

ETIMAT P10-DC 1p B6



Specifikace

Kód ETI	001903007
Popis	ETIMAT P10-DC 1p B6
Jmenovitý proud (A)	6A
Vypínací charakteristika	B
Počet pólů	1
Zkratová odolnost (kA)	10kA
Typ napětí	DC
Jmenovité impulsní výdržné napětí (kV)	6kV
Jmenovité AC napětí (V)	220V
Jmenovité DC napětí (V)	220V
Jmenovitá frekvence (Hz)	1Hz/25Hz
Jmenovitý průřez (mm ²)	1mm ² -25mm ²
Normy	60898-2
Funkce	MCB

[Online stránka produktu](#)


Další dokumentace

[3D model](#)[2D File](#)[Návod](#)[Prohlášení CE](#)[Eplan file](#)

Mezinárodní klasifikace ETIM

Klasifikace	EC000042
Název třídy	Miniature circuit breaker (MCB)
Release characteristic	B
Number of poles (total)	1
Number of protected poles	1
Rated current	6A
Rated voltage	220V
Rated insulation voltage U_i	500V
Rated impulse withstand voltage U_{imp}	6kV
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 230 V	10kA
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 400 V	10kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 230 V	10kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 400 V	10kA
Voltage type	DC
Frequency	1...25Hz
Current limiting class	3
Suitable for flush-mounted installation	1
Concurrently switching neutral conductor	1
Over voltage category	3
Pollution degree	2
Additional equipment possible	1
Width in number of modular spacings	1
Built-in depth	70mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-40...70°C
Connectable conductor cross section multi-wired	1...25mm ²
Connectable conductor cross section solid-core	1...25mm ²

Rozměrový výkres

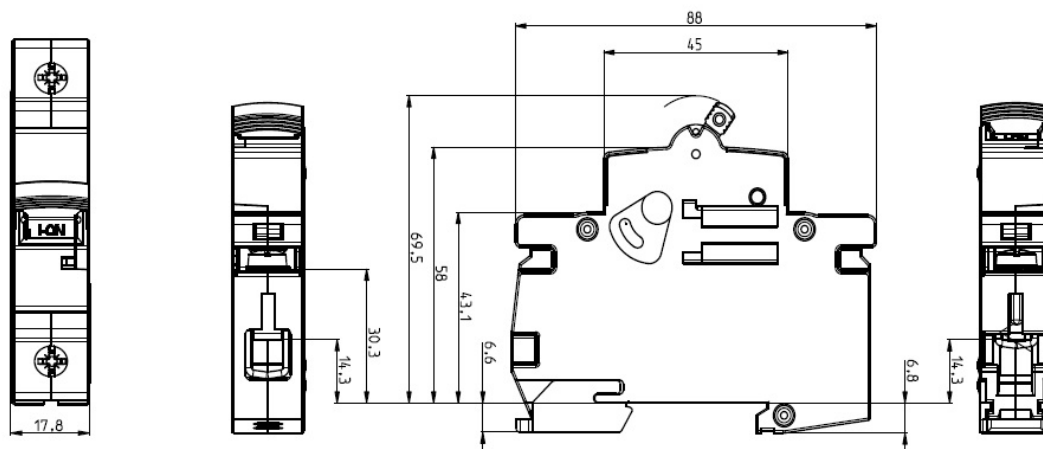

Symbol/připojení

