

KZS-2M A B25/0.03



Specifikace

Kód ETI	002173206
Popis	KZS-2M A B25/0.03
Jmenovitý proud (A)	25A
Typ	A
Jmenovitý reziduální proud (A)	0.03A
Vypínací charakteristika	B
Počet pólů	1+N
Zkratová odolnost (kA)	10kA
Jmenovitá frekvence (Hz)	50Hz/60Hz
Jmenovitý průřez (mm ²)	1mm ² -25mm ²
Normy	IEC/EN 61009

[Online stránka produktu](#)



Další dokumentace

[Katalog technických údajů](#)[3D model](#)[2D File](#)[Návod](#)[Prohlášení CE](#)[Eplan file](#)

Mezinárodní klasifikace ETIM

Klasifikace	EC000905
Název třídy	Earth leakage circuit breaker
Number of poles (total)	2
Number of protected poles	1
Rated voltage	230V
Rated insulation voltage Ui	500V
Rated current	25A
Rated fault current	0,03A
Leakage current type	A
Current limiting class	3
Rated short-circuit breaking capacity according to EN 61009	10kA
Voltage type	AC
Frequency	50/60 Hz
Release characteristic	B
Concurrently switching neutral conductor	Ano
Width in number of modular spacings	2
Built-in depth	69mm
Degree of protection (IP)	IP20
Connectable conductor cross section solid-core	1...25mm ²
Connectable conductor cross section multi-wired	1...25mm ²

Rozměrový výkres

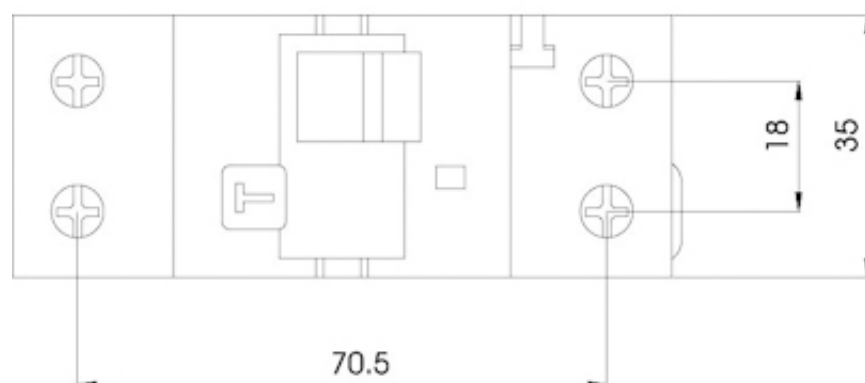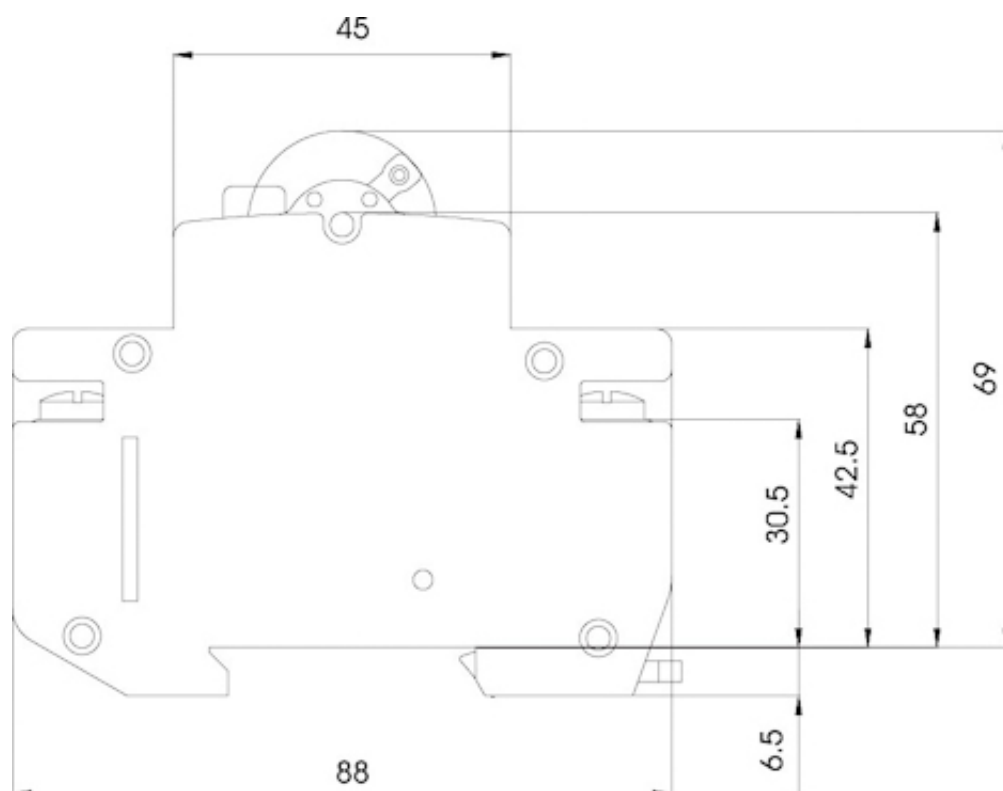

Symbol/připojení

