

ETIMAT P10-DC 2p C25



Specifikace

Kód ETI	001903232
Popis	ETIMAT P10-DC 2p C25
Jmenovitý proud (A)	25A
Vypínací charakteristika	C
Počet pólů	2
Zkratová odolnost (kA)	10kA
Typ napětí	DC
Jmenovité impulsní výdržné napětí (kV)	6kV
Jmenovité AC napětí (V)	440V
Jmenovité DC napětí (V)	440V
Jmenovitá frekvence (Hz)	1Hz/25Hz
Jmenovitý průřez (mm ²)	1mm ² -25mm ²
Normy	60898-2
Funkce	MCB

[Online stránka produktu](#)


Další dokumentace

[3D model](#)[2D File](#)[Návod](#)[Prohlášení CE](#)[Eplan file](#)

Mezinárodní klasifikace ETIM

Klasifikace	EC000042
Název třídy	Miniature circuit breaker (MCB)
Release characteristic	C
Number of poles (total)	2
Number of protected poles	2
Rated current	25A
Rated voltage	440V
Rated insulation voltage U_i	500V
Rated impulse withstand voltage U_{imp}	6kV
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 230 V	10kA
Rated short-circuit breaking capacity I_{cn} according to EN 60898 at 400 V	10kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 230 V	10kA
Rated short-circuit breaking capacity I_{cu} according to IEC 60947-2 at 400 V	10kA
Voltage type	DC
Frequency	1...25Hz
Current limiting class	3
Suitable for flush-mounted installation	Ano
Concurrently switching neutral conductor	Ano
Over voltage category	3
Pollution degree	2
Additional equipment possible	Ano
Width in number of modular spacings	2
Built-in depth	70mm
Degree of protection (IP)	IP20
Ambient temperature during operating	-40...70°C
Connectable conductor cross section multi-wired	1...25mm ²
Connectable conductor cross section solid-core	1...25mm ²

Rozměrový výkres

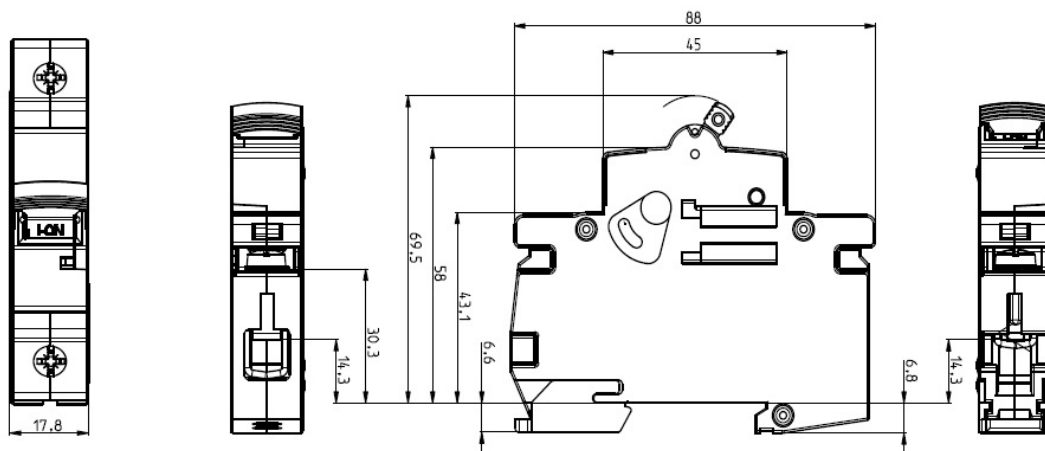

Symbol/připojení

