
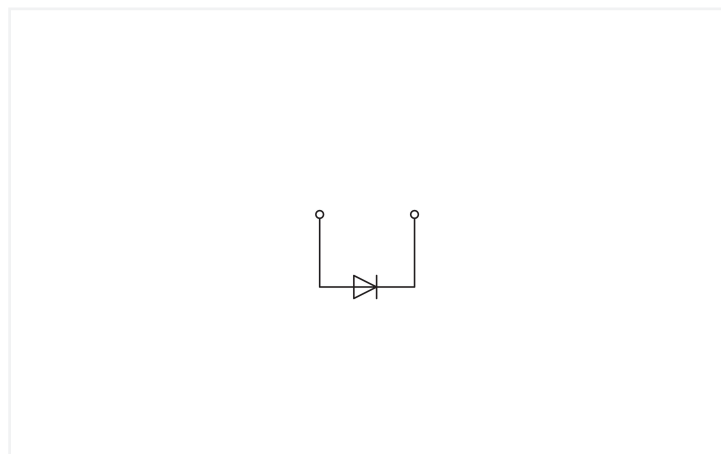


Datový list | Obj. č.: 281-915/281-400

Svorka pro moduly; 2 vodiče; S diodou 1N5408; Anoda vlevo; Na DIN lištu 35 × 15 a 35 × 7,5; 4 mm²; CAGE CLAMP®; Šedá

<https://www.wago.com/281-915/281-400>

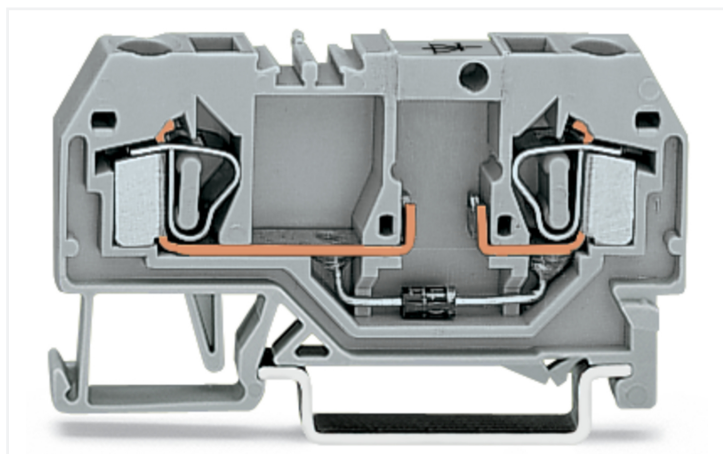

Barva: ■ Šedá

Ilustrační fotografie

Component terminal block with diode, 281 Series, operating tool

Connecting conductors is quick and easy with this component terminal block with diode (item number 281-915/281-400). Strip lengths must be between 9 and 10 mm when connecting conductors to this component terminal block with diode. Featuring conductor terminals along with CAGE CLAMP®, this product outperforms the competition. Our reliable and maintenance-free CAGE CLAMP® connection makes it easy to connect all types of conductors without having to prepare the conductor. For example, you don't need to crimp ferrules. This component terminal block with diode is suitable for conductor cross sections ranging from 0.08 mm² to 4 mm².

Fyzické údaje

Šířka	6 mm / 0.236 palců
Výška	59,2 mm / 2.331 palců
Hloubka od horní hrany DIN lišty	29 mm / 1.142 palců

Soulad produktů s ekologickými standardy

RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Bulgaria)	e953d646-bcb7-4613-89ba-ca26cebae062
SCIP notification number (Czech Republic)	ec41336c-0371-4335-b0c7-3529569dc45d

Atesty/certifikáty

General approvals



Schválení	Standardní	Název certifikátu
KEMA/KEUR DEKRA Certification B.V.	EN 60947	71-107288

Declarations of conformity and manufacturer's declarations

Schválení	Standardní	Název certifikátu
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for marine applications



Schválení	Standardní	Název certifikátu
ABS American Bureau of Ship- ping	-	24-0152298-PDA
DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001V2
PRS Polski Rejestr Statków	-	TE/1094/880590/23

Ke stažení

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance
281-915/281-400



Documentation

Bid Text

281-915/281-400	19.02.2019	xml 3.21 KB	
281-915/281-400	27.04.2017	doc 24.50 KB	

CAD/CAE-Data

CAD data

2D/3D Models
281-915/281-400



CAE data

EPLAN Data Portal
281-915/281-400



WSCAD Universe
281-915/281-400



ZUKEN Portal
281-915/281-400



Pokyny k instalaci

Můstkové propojení



Propojování hřebenovými můstky:
Hřebenové můstky je nutné vždy zatlačit až
na doraz.



Tyto diodové svorky jsou koncipovány speciálně pro sestavování individuálních diodových okruhů, např. zkušebního zapojení světelných zdrojů a obvodů k signalizaci souhrnných poruch.



Otevřená diodová hradla lze vytvořit pomocí následujících svorek:
281-915/281-400 nebo 281-915/281-401