

SOVERT

EGON



Průmyslové výkonné LED MULTI DIP switch světlo s vysokou rázovou odolností.



Základna materiál:	PC - polykarbonát
Difuzor materiál:	PC - polykarbonát
Životnost LED:	L80/B20 – 50 000 h
Distribuce světla:	přímá
Elektro vybavení:	LED moduly, nestmívatelný napaječ ON/OFF
Třída ochrany IEC:	I
Instalace:	přisazená, závěsná
Barva povrchu:	○ bílá
Teplota chromatičnosti:	4000K

PRŮMYSL SPORTOVIŠTĚ SKLADOVACÍ HALY DÍLNÝ

GARÁŽE

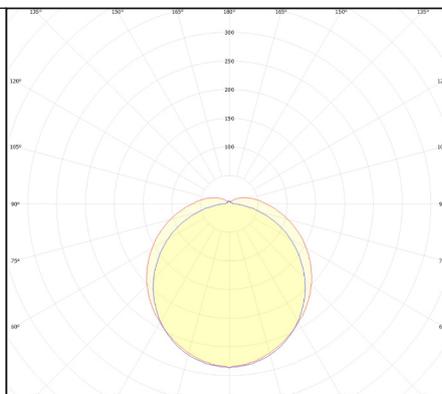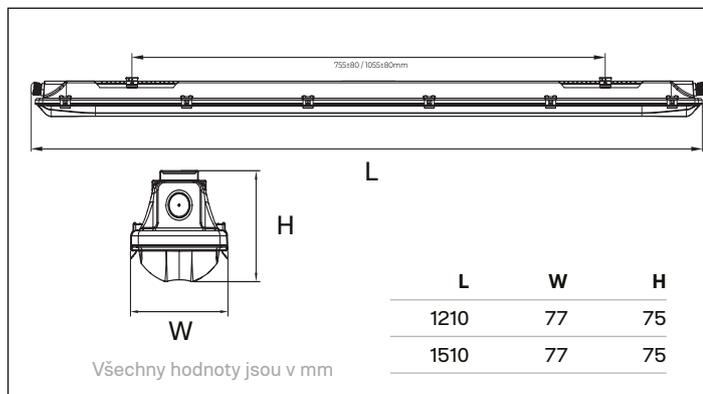

Typ produktu

EGON 

2x vývodka M20, 1x otvor, 3 polová svorkovnice, závěsné háčky

	Příkon	Světelný tok svítidla	Účinnost svítidla	Hmotnost	Délka	Kódy produktu	
	W	lm	lm/W	kg	mm	ON/OFF	EM1
EGON 1.4ft PCc 2600/840	17	2300	135	1.2	1210	7002200	7002203
EGON 1.4ft PCc 3200/840	22	2850	130	1.2	1210	7003200	7003203
EGON 1.4ft PCc 4400/840	28	3500	125	1.2	1210	7004200	7004203
EGON 1.4ft PCc 6400/840  4 v 1	34	4100	121	1.2	1210	7005200	7005203
EGON 1.5ft PCc 4000/840	25	3500	140	1.5	1510	7006200	7006203
EGON 1.5ft PCc 5500/840	33	4300	130	1.5	1510	7007200	7007203
EGON 1.5ft PCc 6500/840	42	5250	125	1.5	1510	7008200	7008203
EGON 1.5ft PCc 8000/840  4 v 1	50	6000	120	1.5	1510	7009200	7009203

ON/OFF | Základní provedení vypnout/zapnout **EM1** | Záložní zdroj pro nouzové osvětlení, operační čas 1 hodina
| Tolerance světelného toku a příkonu svítidel ±7,5%

MOŽNOST NASTAVENÍ ČTYŘ ÚROVNÍ SVĚTLNÉHO TOKU POMOCÍ DIPOVATELNÉHO DRIVERU

DIP SWITCH



EGON 1.4ft PCc 6400/840

Typ svítidla	W	lm	4 v 1	PIN 1	PIN2
6400	34	4100	LED DRIVER (DIP SWITCH)	ON	ON
4400	28	3500	LED DRIVER (DIP SWITCH)	ON	OFF
3200	22	2850	LED DRIVER (DIP SWITCH)	OFF	ON
2600	17	2300	LED DRIVER (DIP SWITCH)	OFF	OFF

EGON 1.5ft PCc 8000/840

Typ svítidla	W	lm	4 v 1	PIN 1	PIN2
8000	50	6000	LED DRIVER (DIP SWITCH)	ON	ON
6500	42	5250	LED DRIVER (DIP SWITCH)	ON	OFF
5500	33	4300	LED DRIVER (DIP SWITCH)	OFF	ON
4000	25	3500	LED DRIVER (DIP SWITCH)	OFF	OFF

