

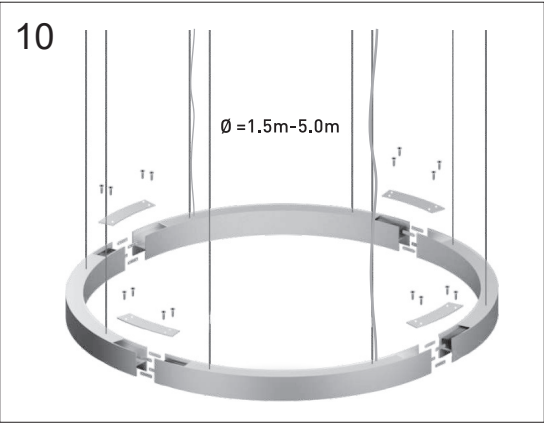
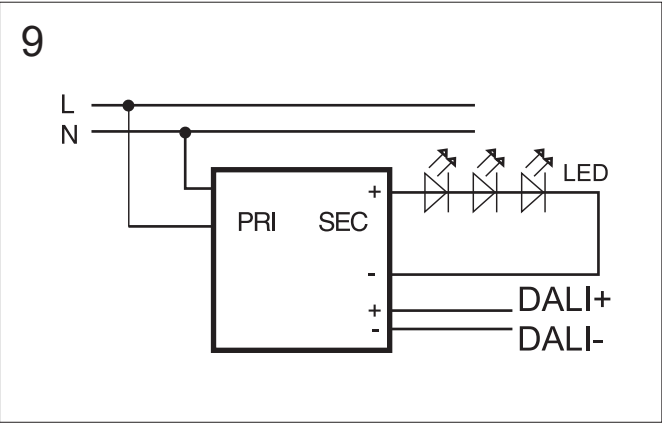
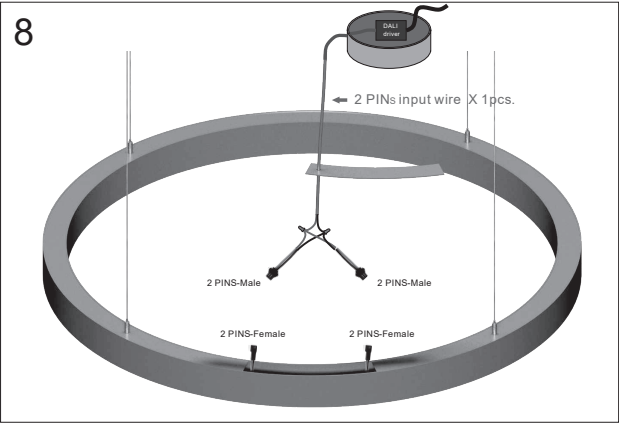
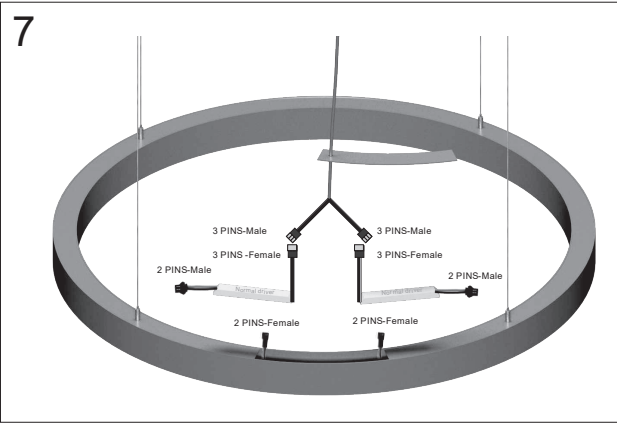
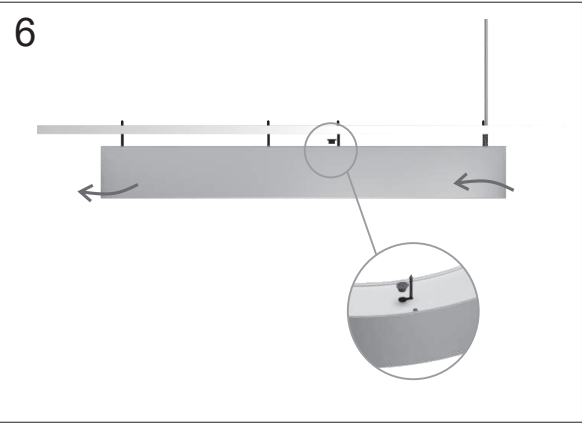
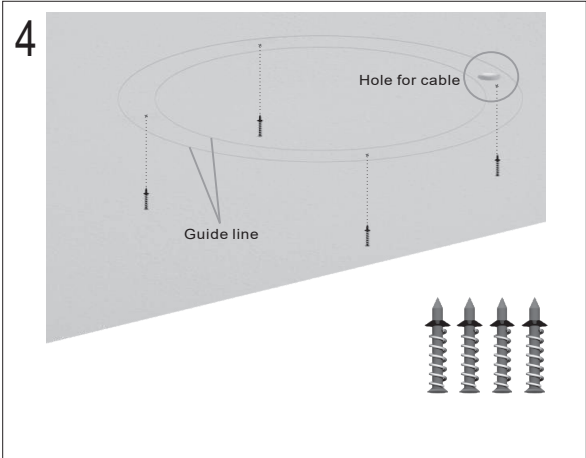
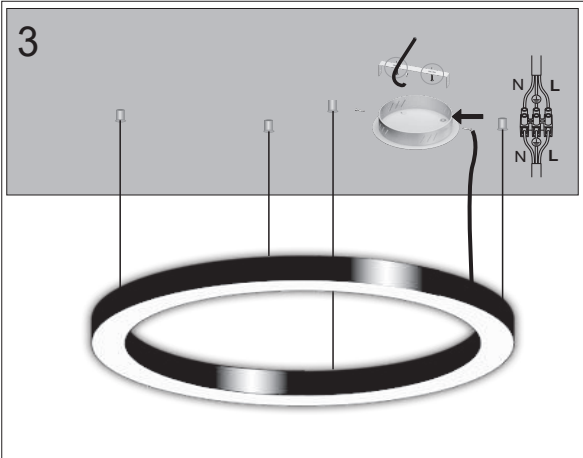
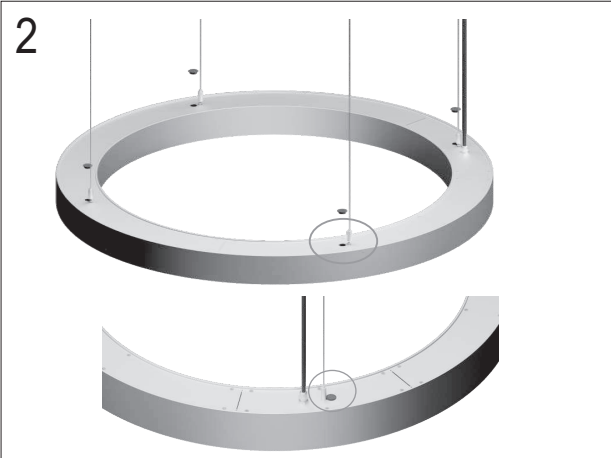
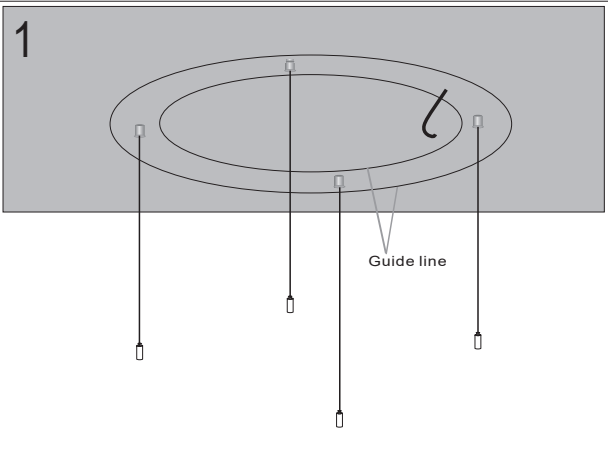
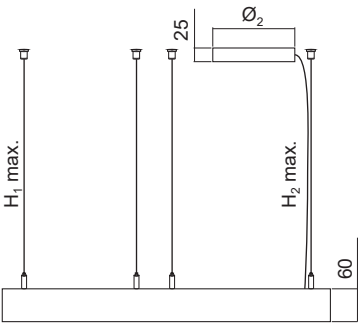



TECHNICAL FEATURES

Code	Type of LED	Power P(W)	Input voltage (V)	Color temperature of LED	Working temperature	Dimensions Ø/Ø1/Ø2 / ØxH (mm)	Weight (kg)	Energy efficiency class
AM01WW/NW SWH/SBK/SGD	SMD 2835	38W	220-240V AC	3000K / 4000K	-20 ÷ +55 °C	600/520/150 mm	2,80 kg	F/F
AM02WW/NW SWH/SBK/SGD	SMD 2835	57W	220-240V AC	3000K / 4000K	-20 ÷ +55 °C	900/820/200 mm	4,20 kg	F/F
AM03WW/NW SWH/SBK/SGD	SMD 2835	75W	220-240V AC	3000K / 4000K	-20 ÷ +55 °C	1200/1120/200 mm	5,60 kg	F/F
AM04WW/NW SWH/SBK/SGD	SMD 2835	97W	220-240V AC	3000K / 4000K	-20 ÷ +55 °C	1540/1460/250 mm	7,23 kg	F/F
AM05WW/NW SWH/SBK/SGD	SMD 2835	120W	220-240V AC	3000K / 4000K	-20 ÷ +55 °C	2040/1960/250 mm	9,58 kg	F/F
AM01CBDALI SWH/SBK/SGD	-	38W	220-240V AC	-	-20 ÷ +55 °C	Ø150x30 mm	0,55 kg	-/-
AM02CBDALI SWH/SBK/SGD	-	57W	220-240V AC	-	-20 ÷ +55 °C	Ø200x40 mm	1,10 kg	-/-
AM03CBDALI SWH/SBK/SGD	-	75W	220-240V AC	-	-20 ÷ +55 °C	Ø250x40 mm	1,70 kg	-/-
AM04CBDALI SWH/SBK/SGD	-	97W	220-240V AC	-	-20 ÷ +55 °C	Ø250x40 mm	1,70 kg	-/-
AM05CBDALI SWH/SBK/SGD	-	120W	220-240V AC	-	-20 ÷ +55 °C	Ø250x40 mm	1,70 kg	-/-

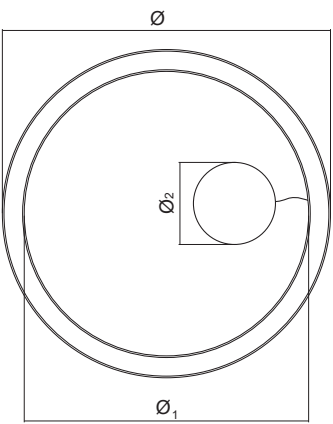

OPEN SIZE 420x297mm

CLOSED SIZE 105x148,5mm

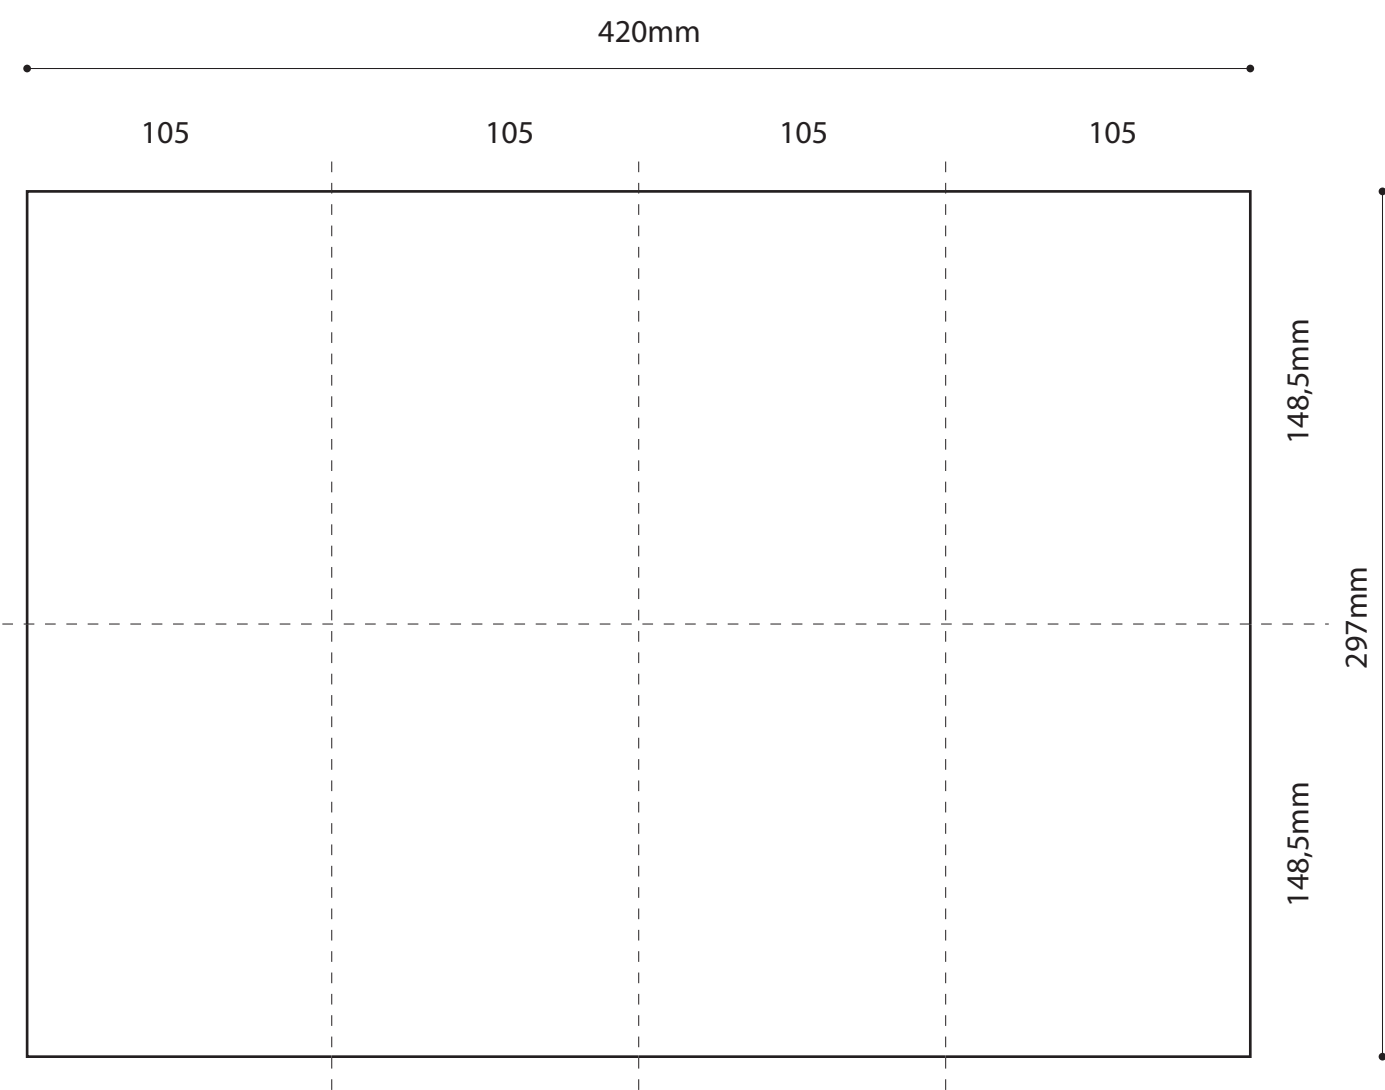

PRINT: 1 color (black) front and back side)

