

ETIMAT P10-DC 2p C20

jistič



ETI kód:	001903231
Aplikace:	60898-2
Jmenovitý proud:	20 A
Vypínací charakteristika:	C
Počet pólů:	2
Zkratová odolnost:	10 kA
Typ napětí:	DC
Jmenovité impulsní výdržné napětí (kV):	6 kV
Jmenovité AC napětí:	440 V
Jmenovité DC napětí:	440 V
Jmenovitá frekvence (Hz):	1/25 Hz
Jmenovitý průřez (mm²):	1-25 mm²
Normy:	60898-2
Funkce:	MCB

Online stránka produktu [🔗](#)

Dokumenty



KATALOG TECHNICKÝCH DAT



NÁVOD K POUŽITÍ



PROHLÁŠENÍ



2D SOUBOR



3D SOUBOR



EPLAN SOUBOR

ETIM

Additional equipment possible	Ano
Rated insulation voltage Ui	500 V
Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 230 V	10 kA
Built-in depth	70 mm
Voltage type	DC
Rated short-circuit breaking capacity Icn according to EN 60898 at 400 V	10 kA
Rated short-circuit breaking capacity Icu according to IEC 60947-2 at 400 V	10 kA
Rated impulse withstand voltage Uimp	6 kV
Degree of protection (IP)	IP20
Release characteristic	C
Over voltage category	3
Number of poles (total)	2
Pollution degree	2
Concurrently switching neutral conductor	Ano
Number of protected poles	2
Rated voltage	440 V
Current limiting class	3
Rated current	20 A
Flush-mounted installation	Ano
Rated short-circuit breaking capacity Icn according to EN 60898 at 230 V	10 kA
Width in number of modular spacings	2
Frequency(Min)	1 Hz
Ambient temperature during operating(Min)	-40 °C
Connectable conductor cross section solid-core(Min)	1 mm²
Connectable conductor cross section multi-wired(Min)	1 mm²
Connectable conductor cross section solid-core(Max)	25 mm²
Connectable conductor cross section multi-wired(Max)	25 mm²
Frequency(Max)	25
Ambient temperature during operating(Max)	70 °C

Logistika

Produkt

EAN code for a single product	3838895962847
Hmotnost	0,249 kg
Net width	35,6 mm
Net height	89 mm
Net depth	74,74 mm
Stock unit of measure	pcs


Základní balení

Basic packaging quantity	6 pcs
EAN code for a basic packaging	3838895962854
Basic packaging weight	1,55 kg
Basic Packaging Dimensions Height	79 mm
Basic Packaging Dimensions Width	91 mm
Basic Packaging Dimensions Depth	220 mm
Basic packaging volume	1,582 dm³


Přepravní balení

Transport packaging quantity	54 pcs
EAN code for a transport packaging	3838895962861
Transport packaging weight	14,303 kg
Transport Packaging Dimensions Height	0,25 m
Transport Packaging Dimensions Width	0,235 m
Transport Packaging Dimensions Depth	0,295 m
Transport packaging volume	0,017 m³
Pallet quantity	2 808 pcs
Customs tariff	85362010

Dimension

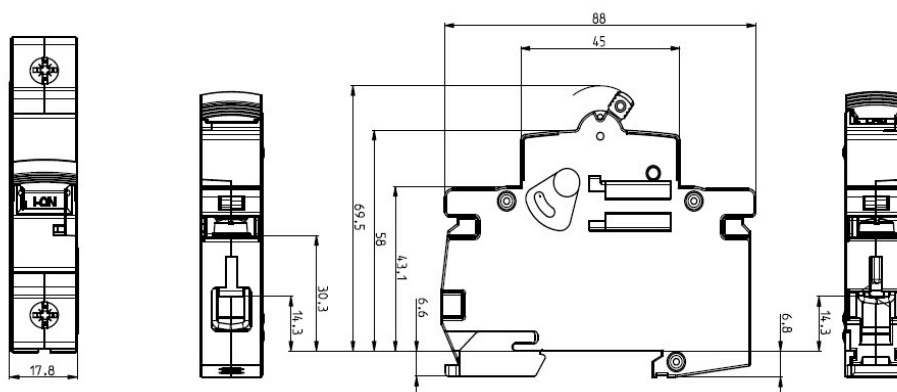

I/t characteristic

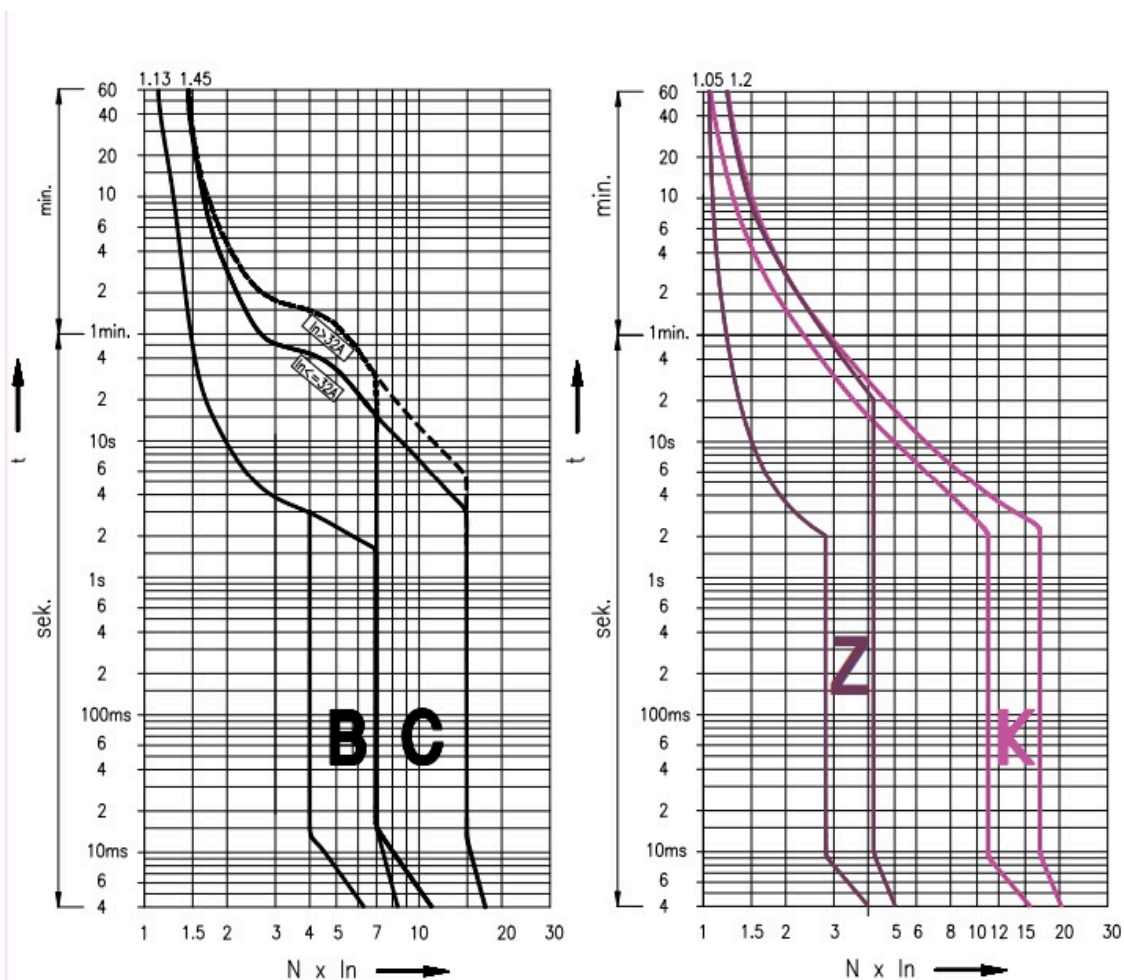

Symbol connection

