



SINGLE OUTLET, QUADRANGULAR, HOLLOW SPACE FLOOR BOX

ASSEMBLY INSTRUCTIONS

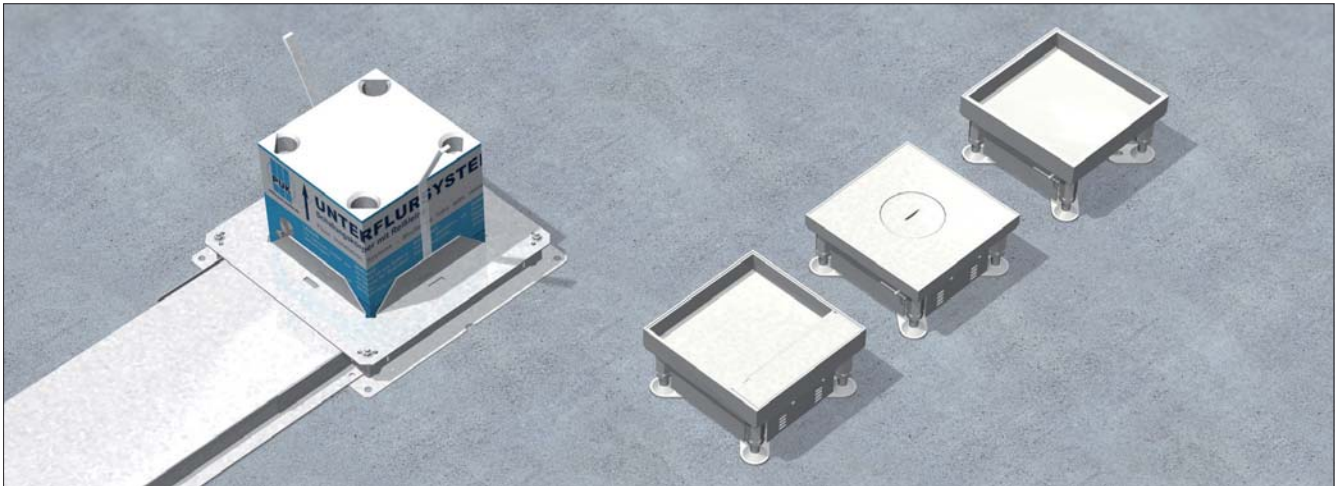


Quadrangular single outlets with outer measurements of 160x160 mm for the integration of up to 2 installation devices of 45x45 mm for fixture in hollow space floor boxes.

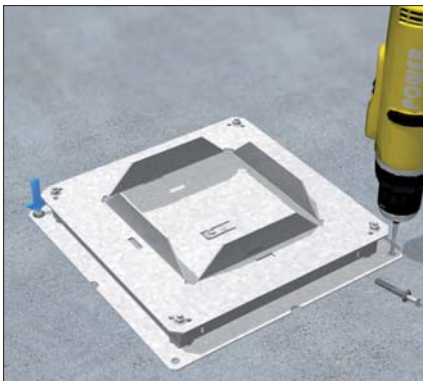


Hollow space floor box

Align floor box in centre to cable run. Mount with two nail plugs.

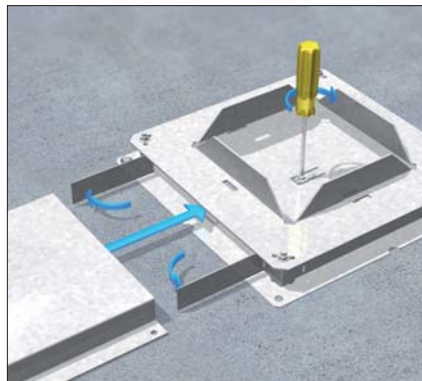

Duct

Screw on earthing lug. Bend the sides of the floor box open along the perforation. Insert duct all the way into the box.

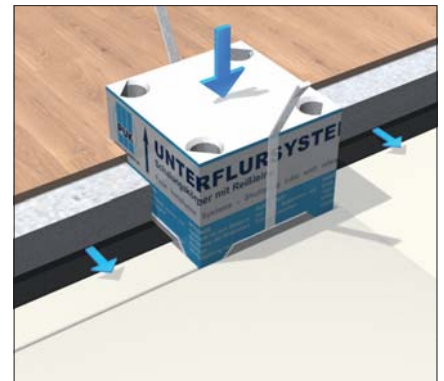


Shuttering unit

Insert the shuttering unit, process screed to the body, remove the shuttering unit after precipitation.




Fixation

Insert the frame and mount the four levelling legs onto the bottom of the hollow floor box with nail plugs.

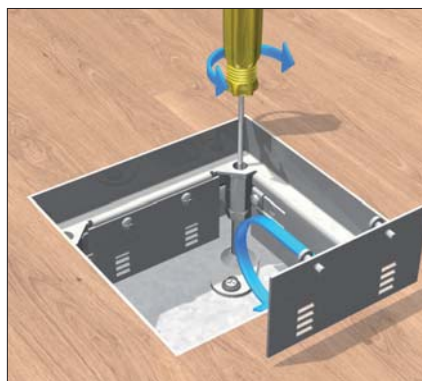

Floor adjustment

Adjust the single outlet succinctly above the four levelling screws. Screw in the lock-in leads.

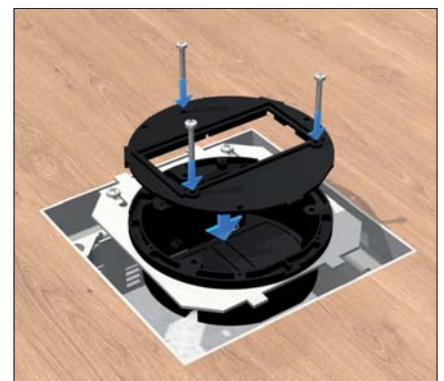

Cover plate

Fix the cover plate onto the device cup with screws.

SINGLE-OUTLET, QUADRANGULAR, HOLLOW SPACE FLOOR BOX

ASSEMBLY INSTRUCTIONS




Fixture of installation tools

Latch installation tools 45x45 mm in the cover plate UARM-4-1 118 2.



Device cup

Place the device cup into plate, insert the ducts into strain relief and screw in the fixing bolt.

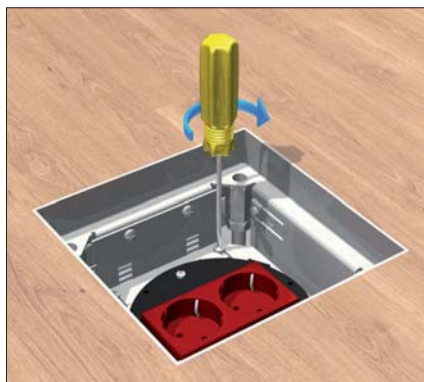

Lock-in lead

Insert the plate above the plate slide as deeply into the lock-in leads as possible. For a stepwise shafting of the plate until up to 20 mm.




Installation of installation devices

In cover plate UARM-3-1 118
Latch 1 installation device 45 x 45 mm
and 1 installation device 22,5 x 45 mm.




Installation of installation devices

In cover plate UARM-2-1 118
Latch 2 installation devices 22,5x45 mm.

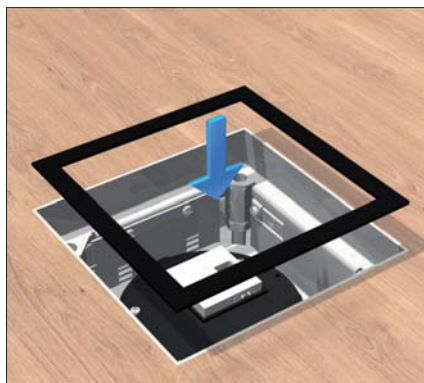

Rubber seal

Glue the rubber seal into the frame.

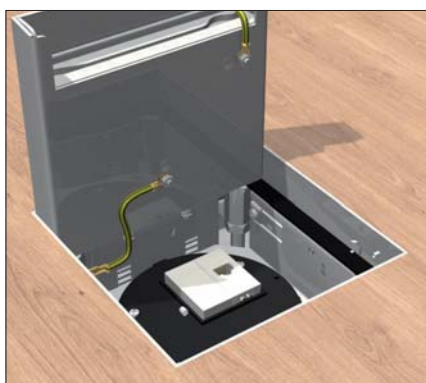


Earthing connection

Establish an earthing connection between the single outlet frame and the cover. Factor the single outlet into the potential equalisation.



Single outlet

Close the cover.

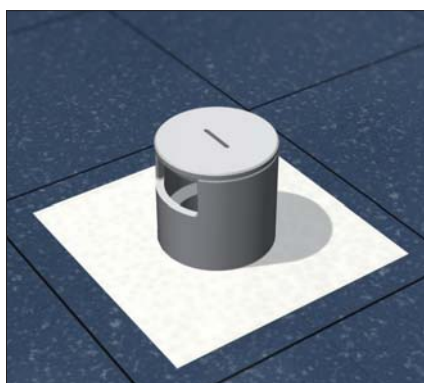

Tube

For wet maintenance floors install tube single outlet and tube.