


ESC-CBC.2

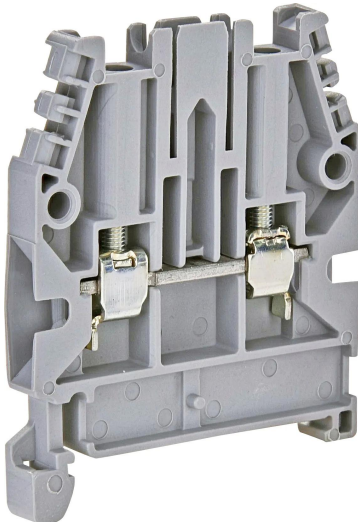

Specifikace

Kód ETI	003903000
Popis	ESC-CBC.2
Typ	ES Screw Type Terminal Blocks
Úroveň	Jednoduchý
Barva	Šedý
Jmenovitý průřez (mm ²)	2.5mm ²
Jmenovité impulsní výdržné napětí (kV)	12kV
Jmenovitý průřez pro max. proud (mm ²)	24mm ²
Max. proud s max. průřezem (mm ²)	37mm ²
Připojitelný průřez plného vodiče (mm ²)	0.2mm ² -4mm ²
Křížové spojení	YES
Koncová část nutná	YES

[Online stránka produktu](#)

Další dokumentace

[Katalog technických údajů](#)[3D model](#)[2D File](#)[Návod](#)[Prohlášení CE](#)[Eplan file](#)

Mezinárodní klasifikace ETIM

Klasifikace	EC000897
Název třídy	Feed-through terminal block
Connectable conductor cross section fine-strand without cable end sleeve	0.2...4
Connectable conductor cross section fine-strand with cable end sleeve	0.2...2.5
Connectable conductor cross section solid-core	0.2...4
Connectable conductor cross section multi-wired	0.2...4
Rated current In	37
Rated voltage	1000
Type of electrical connection 1	Screw connection
Type of electrical connection 2	Screw connection
Number of levels	1
Number of clamp positions per level	2
Mounting method	DIN rail (top hat rail) 35 mm
Material insulation body	Thermoplastic
Operating temperature	-40...100
Inflammability class of insulation material according to with UL94	V0
Closing plate required	1
Colour	Grey
Internally connected stages	