

CEM250E.22-250V-AC/DC



Specifikace

Kód ETI	004646032
Popis	CEM250E.22-250V-AC/DC
Proud Ie AC1 (A)	350A
Proud Ie AC3, 400V (A)	250A
Jmenovité pracovní napětí (V AC)	1000V
Jmenovité napětí ovládacího proudu Uc (V AC): 230	250V
Jmenovité napětí ovládacího proudu Uc (V DC)	250V
Počet pólů	3
Počet pomocných NO kontaktů	2
Počet pomocných NC kontaktů	2
Funkce	Motorový stykač
Skupina katalogu	CEM Motorový stykač

[Online stránka produktu](#)

Další dokumentace

[Katalog technických údajů](#)[3D model](#)[2D File](#)[Návod](#)[Prohlášení CE](#)[Eplan file](#)

Mezinárodní klasifikace ETIM

Klasifikace	EC000066
Název třídy	Power contactor, AC switching
Rated control supply voltage AC 50 Hz	208...250V
Rated control supply voltage AC 60 Hz	250...250V
Rated control supply voltage DC	250...250V
Voltage type for actuating	AC/DC
Rated operation current I _e at AC-1, 400 V	350A
Rated operation current I _e at AC-3, 400 V	250A
Rated operation power at AC-3, 400 V	132kW
Modular version	Ne
Number of auxiliary contacts as normally open contact	2
Number of auxiliary contacts as normally closed contact	2
Type of electrical connection of main circuit	Rail connection
Number of normally open contacts as main contact	3

Rozměrový výkres

CEM250(E)

CEM300(E)

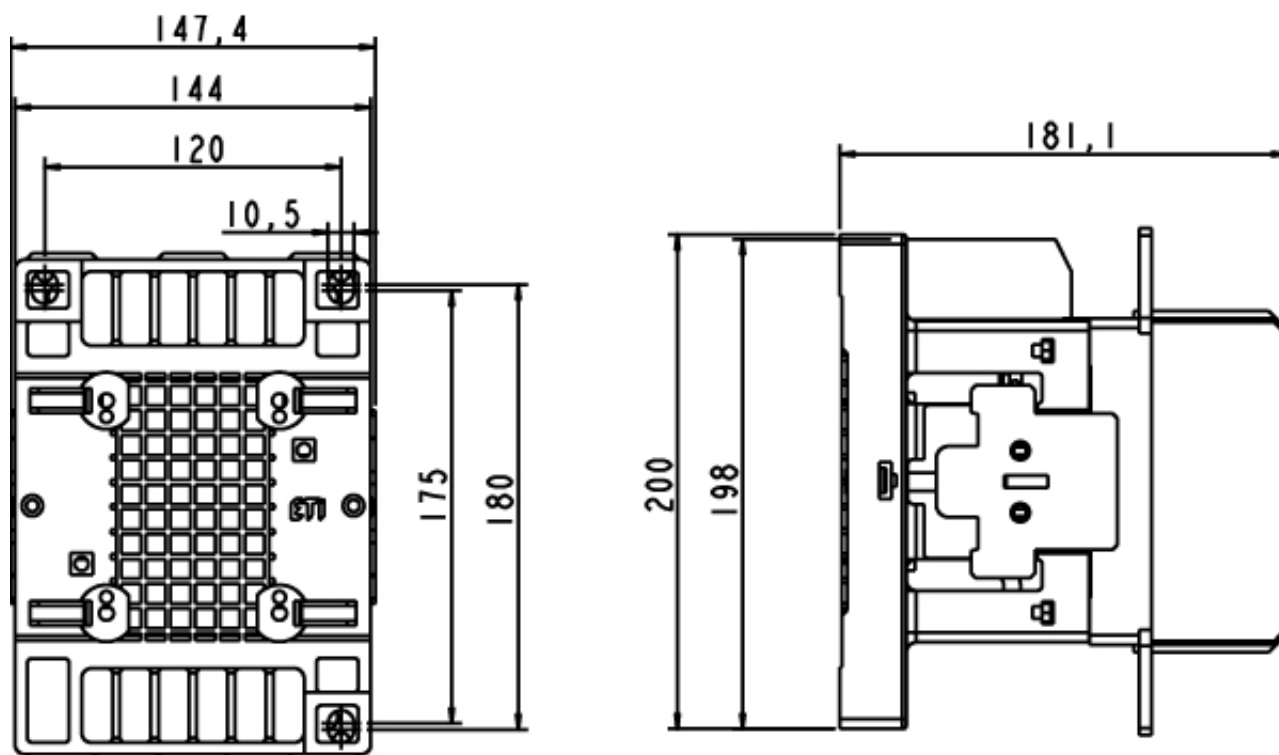


Schéma zapojení

